


DATASHEET

MTP®/APC(M)-LC Fanout cable OS2 8 fibers Typ B LSZH yellow 0,4m

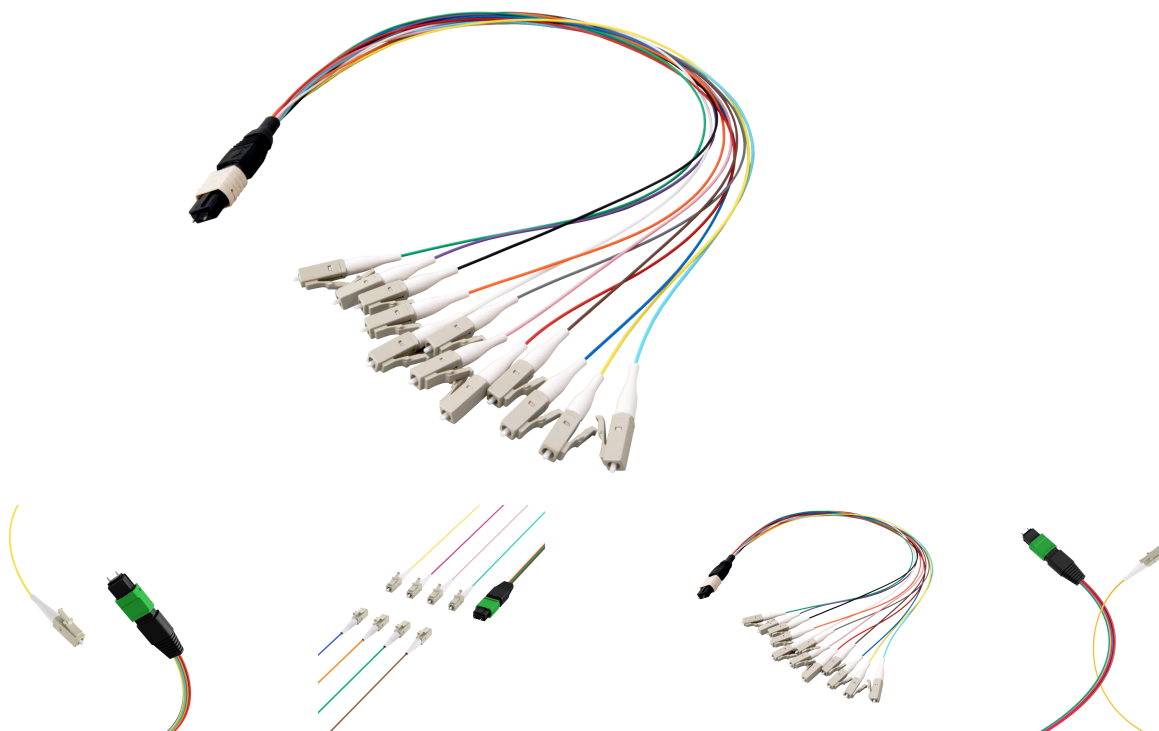

General data

Application: Suitable for transmission links up to **100 Gigabit**

Construction: 1 multi-connector MTP® Male on one side,
8 Single connector on the other side (e.g. LC)

Assignment MTP 1-4 + 9-12

LowLoss

version: attenuation per Fanout max. 0,35dB

Matrix: 8 fibers

Cable diameter single-connector: 900µm

Colour: OM4, OM3 and OS2 acc. to colour code DIN VDE 0888

MTP Singlemode connectors are in APC version

Tekniske egenskaber

Available variants

This datasheet was created automatically on 17-09-2026 . Technical changes reserved.




DATASHEET

MTP®/APC(M)-LC Fanout cable OS2 8 fibers Typ B LSZH yellow 0,4m

ArtNr.	Bezeichnung	Halogen free (according to EN 60754-1/2)	Length	Number of connectors connection 1	Number of connectors connection 2	Number of fibres
MTPM08LCOS2-0,4	MTP®/APC(M)-LC Fanout cable OS2 8 fibers Typ B LSZH yellow 0,4m	True	0.4 m	1 x MTP®/APC (M)	8 x LC	8
MTPM08LCOS2-1	MTP®/APC(M)-LC Fanout cable OS2 8 fibers Typ B LSZH yellow 1m	True	1.0 m	1 x MTP®/APC (M)	8 x LC	8
MTPM08LCOS2-3	MTP®/APC(M)-LC Fanout cable OS2 8 fibers Typ B LSZH yellow 3m	True	3.0 m	1 x MTP®/APC (M)	8 x LC	8

datasheets.content.drawings

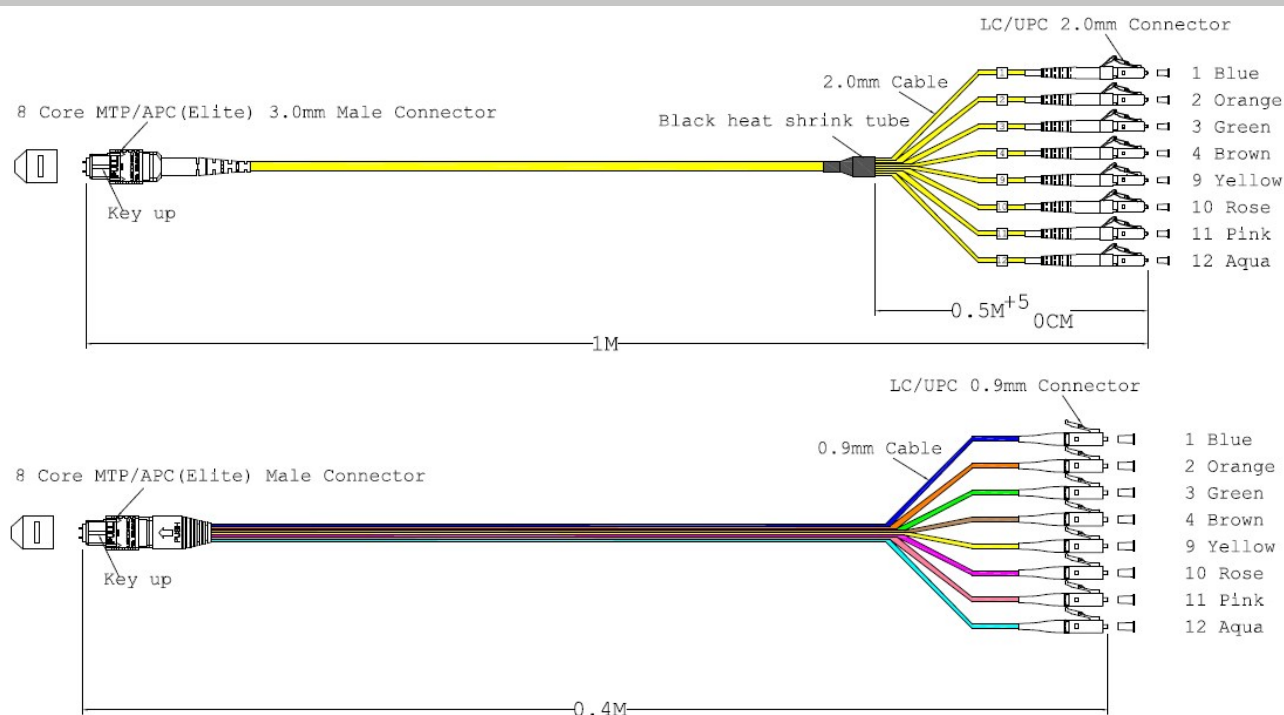

This datasheet was created automatically on 17-09-2026 . Technical changes reserved.

DATASHEET

MTP®/APC(M)-LC Fanout cable OS2 8 fibers Typ B LSZH yellow 0,4m



Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 17-09-2026 . Technical changes reserved.