


DATASHEET

MTP®/APC(M)-LC/APC Fanout cable OS2 12 fibers Typ B LSZH yellow 1m

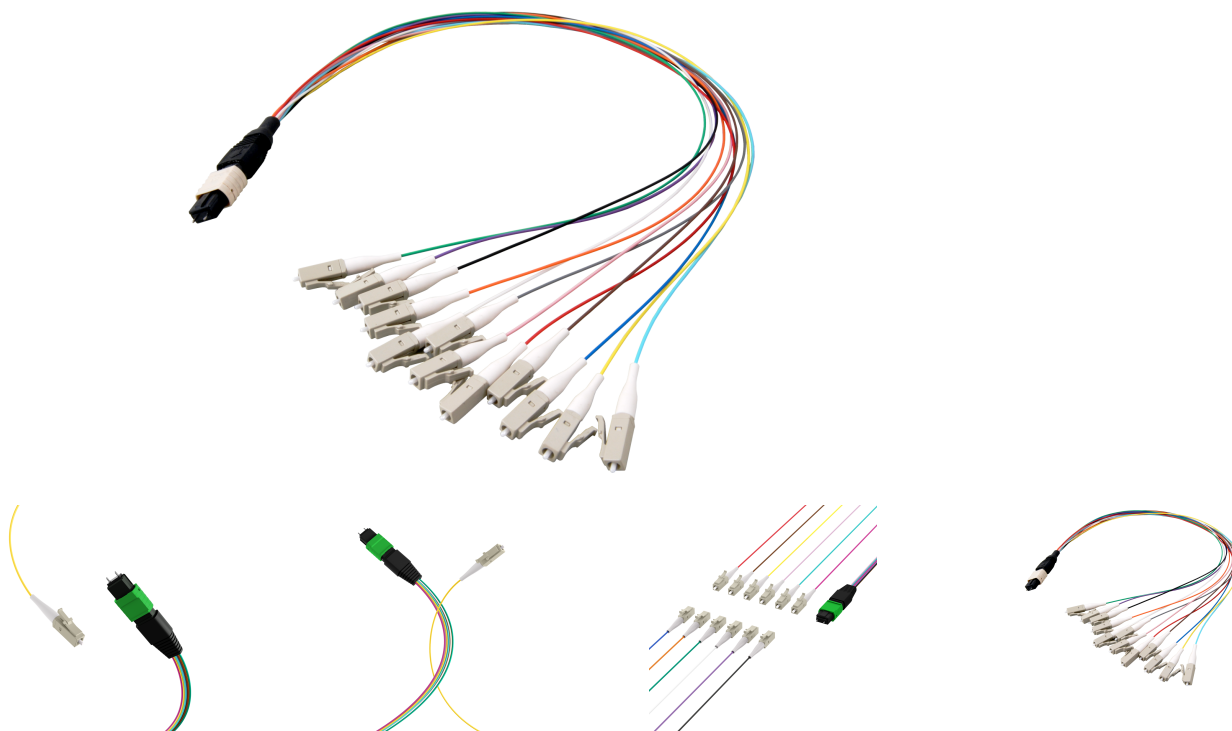

General data

Application: Suitable for transmission links up to **100 Gigabit**

Construction: 1 multi-connector MTP® on one side,
12 Single connector on the other side (e.g. LC)

LowLoss version: attenuation per Fanout max. 0,35dB

Matrix: 12 fibers

Cable diameter single-connector: 900µm

Colour: OM4, OM3 and OS2 acc. to colour code DIN VDE 0888

MTP Singlemode connectors are in APC version

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Halogen free (according to EN 60754-1/2)	Number of Length connectors connection 1	Number of connectors connection 2	Number of fibres
--------	-------------	--	--	---	---------------------

This datasheet was created automatically on 19-09-2026 . Technical changes reserved.





DATASHEET

MTP®/APC(M)-LC/APC Fanout cable OS2 12 fibers Typ B LSZH yellow 1m

MTPM12LCAPC-1	MTP®/APC(M)-LC/APC Fanout cable OS2 12 fibers Typ B LSZH yellow 1m	True	1.0 m	1 x MTP®/APC (M)	12 x LC/APC	12
---------------	--	------	-------	---------------------	-------------	----

datasheets.content.drawings

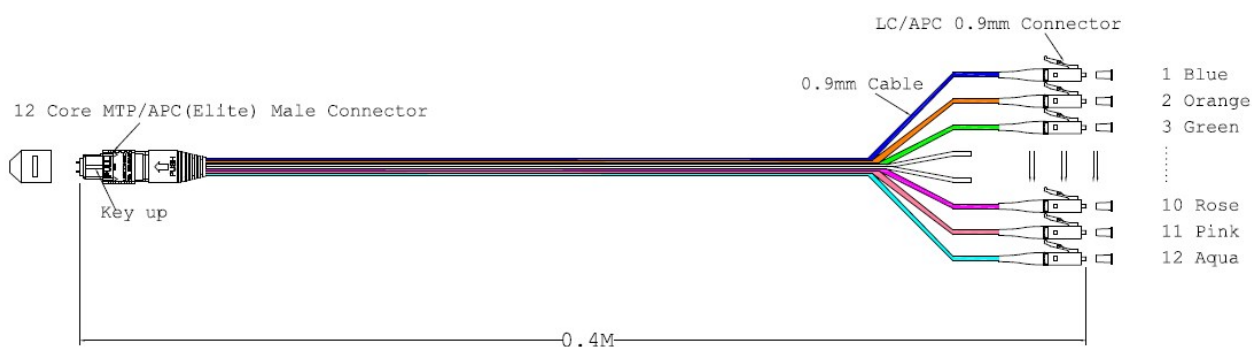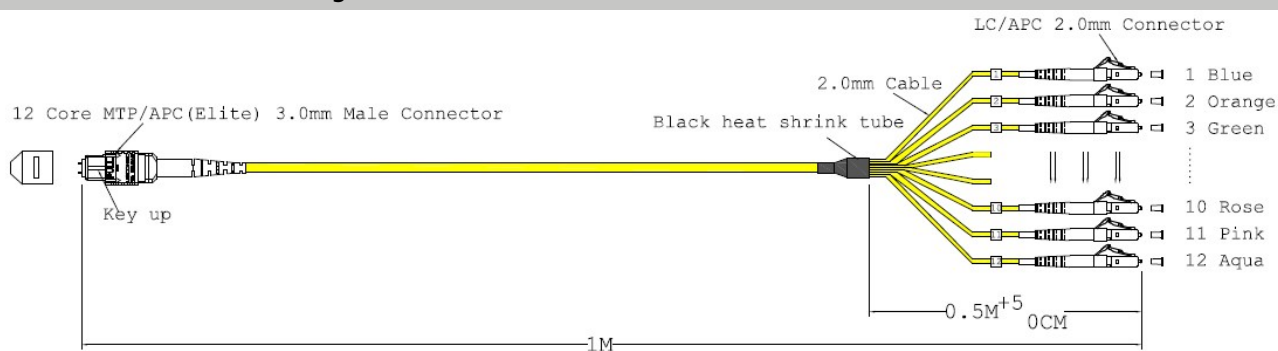

This datasheet was created automatically on 19-09-2026 . Technical changes reserved.

DATASHEET

MTP®/APC(M)-LC/APC Fanout cable OS2 12 fibers Typ B LSZH yellow 1m



Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 19-09-2026 . Technical changes reserved.