
DATASHEET

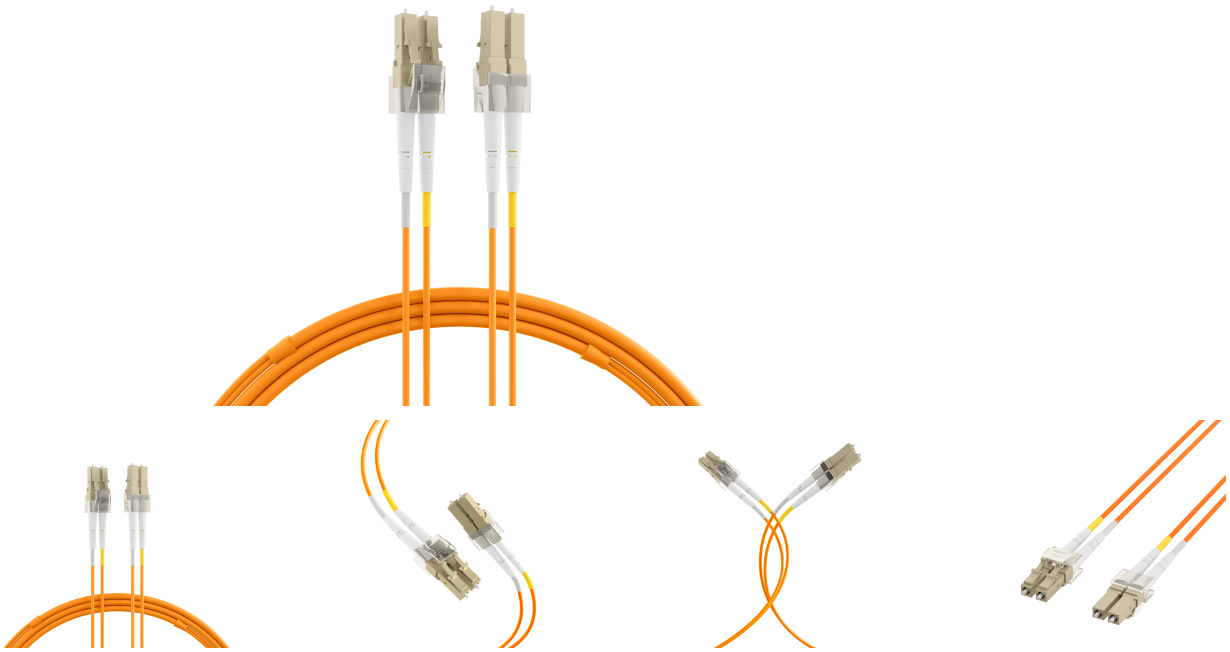

General data

The Flat Twin Duplex Jumper have a higher stability due to the additional added outer jacket and can be installed much easier than standard jumper. Also the jacket material is made of LSZH.

Characteristics

Additional outer jacket for higher stability and easier installation
Halogen free according to IEC-60754-2
Flame retardant according to IEC-60332-1
Low smoke according to IEC-61034
Cable whip length of 150 mm inclusive connector
Same colour of Cable whip and jacket material
Compact cable diameter of 3x5 mm
Simple allocation of the fibers with boots in different colours or A/B markers
Possibility of coding with clips enclosed to the delivery

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Length
O0310FT.25		25.0 m

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION