


DATASHEET

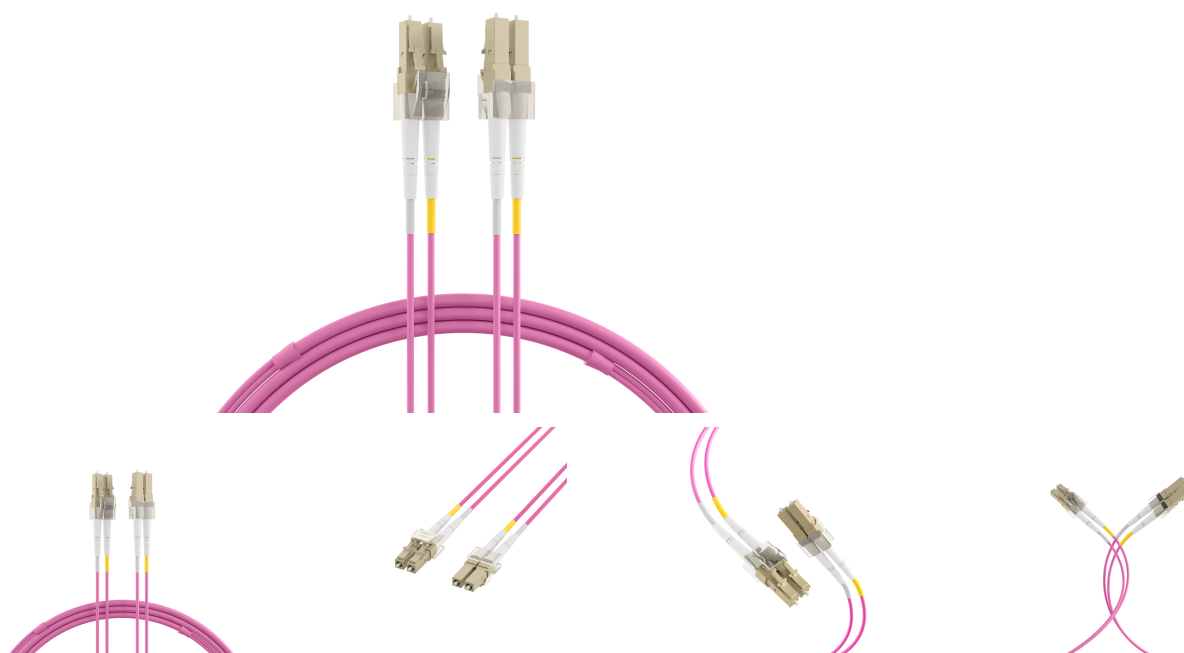

General data

The Flat Twin Duplex Jumper have a higher stability due to the additional added outer jacket and can be installed much easier than standard jumper. Also the jacket material is made of LSZH.

Characteristics

- Additional outer jacket for higher stability and easier installation
- Halogen free according to IEC-60754-2
- Flame retardant according to IEC-60332-1
- Low smoke according to IEC-61034
- Cable whip length of 150 mm inclusive connector
- Same colour of Cable whip and jacket material
- Compact cable diameter of 3x5 mm
- Simple allocation of the fibers with boots in different colours or A/B markers
- Possibility of coding with clips enclosed to the delivery

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Length	Length tolerance
00319FT.10	Duplex Patchcable Flat-Twin LC-LC OM4 10m LSZH 3x5mm heatherviolet	10.0 m	±5 %


This datasheet was created automatically on 25-09-2026 . Technical changes reserved.



DATASHEET

O0319FT.35	Duplex Patchcable Flat-Twin LC-LC OM4 35m LSZH 3x5mm heatherviolet	35.0 m	±5 %
O0319FT.50	Duplex Patchcable Flat-Twin LC-LC OM4 50m LSZH 3x5mm heatherviolet	50.0 m	±5 %
O0319FT.0,5		0.5 m	
O0319FT.1		1.0 m	
O0319FT.15		15.0 m	
O0319FT.2		2.0 m	
O0319FT.20		20.0 m	
O0319FT.25		25.0 m	
O0319FT.3		3.0 m	
O0319FT.30		30.0 m	
O0319FT.40		40.0 m	
O0319FT.5		5.0 m	
O0319FT.7,5		7.5 m	

datasheets.content.drawings

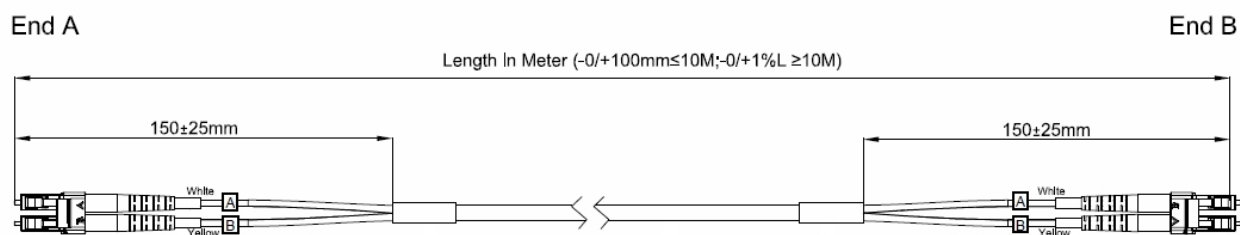

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 25-09-2026 . Technical changes reserved.

