


DATASHEET

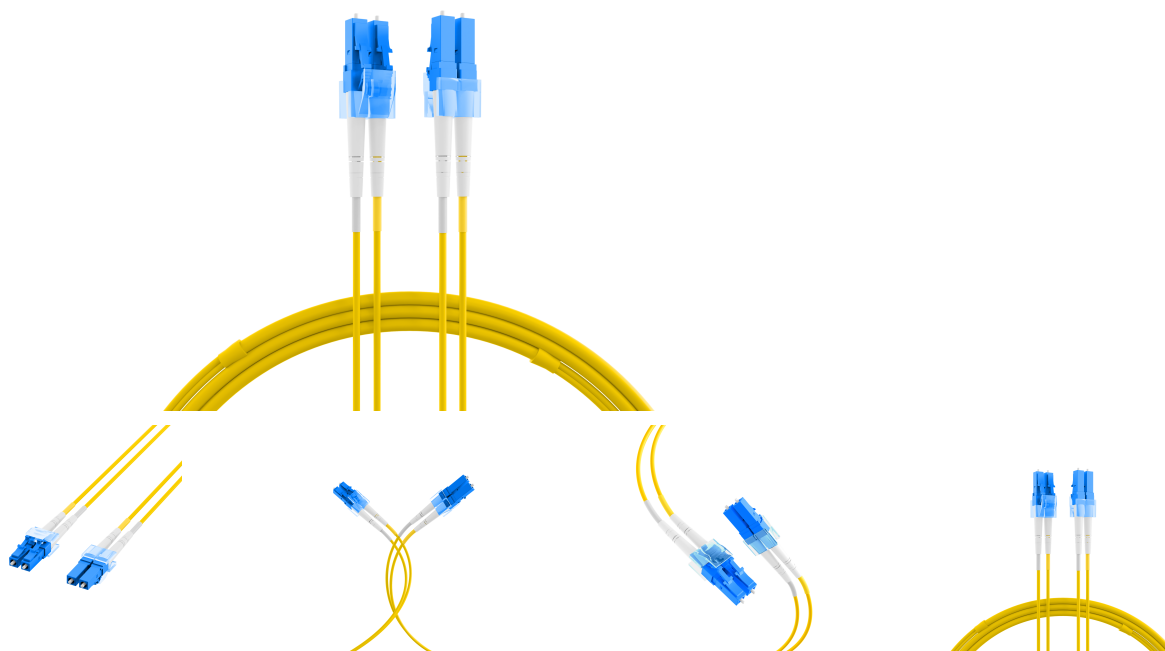

General data

The 1.2 mm Duplex Jumper are characterized due to the small outer diameter. This is an advantage for the installers when they have limited space for cable management. The small outer diameter is also useful in projects with high density areas.

Characteristics

- Space-saving installation due to the small outer diameter
- Halogen free according to IEC-60754-2
- Flame retardant according to IEC-60332-1
- Low smoke according to IEC-61034
- Connector in colour of category (aqua, erika-violet or blue)
- LC connector in Compact design
- EFB fiber connectors meet the quality classes
- Grade B/2 according to IEC-61753-1 for Singlemode
- Grade A/1 according to IEC-61753-122-2 (Draft) for Multimode
- pre-coded
- 100% tested and with individuell measuring protocol

Tekniske egenskaber

This datasheet was created automatically on 25-09-2026 . Technical changes reserved.




DATASHEET

Available variants

ArtNr.	Bezeichnung	Length	Length tolerance
O0350.2-1.2	Duplex Patchcable LC-LC OS2 G652D 2m LSZH 1,2mm yellow	2.0 m	±5 %
O0350.0,5-1.2		0.5 m	
O0350.1-1.2		1.0 m	
O0350.10-1.2		10.0 m	
O0350.3-1.2		3.0 m	
O0350.5-1.2		5.0 m	

datasheets.content.drawings

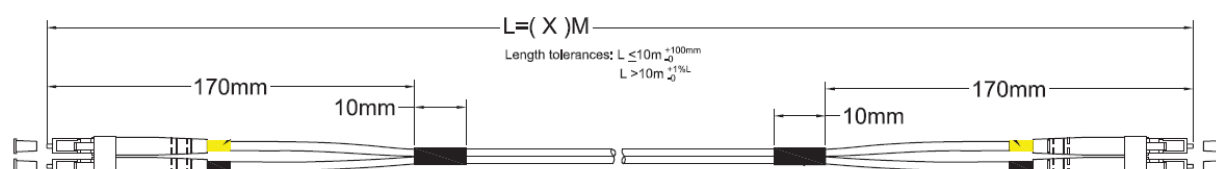

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 25-09-2026 . Technical changes reserved.