

DATASHEET



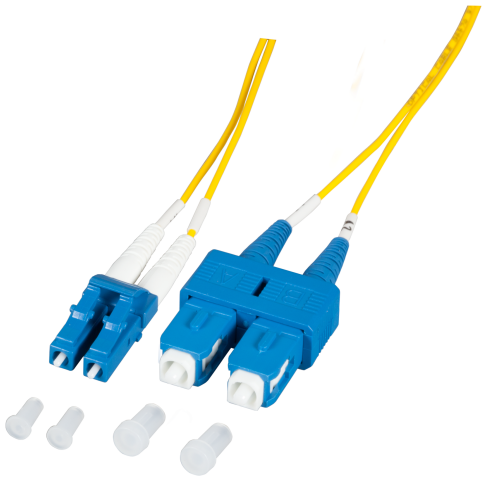



General data

The 1.2 mm Duplex Jumper are characterized due to the small outer diameter. This is an advantage for the installers when they have limited space for cable management. The small outer diameter is also useful in projects with high density areas.

Characteristics

Space-saving installation due to the small outer diameter
Halogen free and flame retardant according to IEC-60754-2, IEC-60332-1 and IEC-61034
Connector in colour of category (OS2 is blue)
LC connector in Compact design
EFB fiber connectors meet the quality class Grade A/1 for Multimode according to IEC-61753-122-2 (Draft)
pre-coded
100% tested and with individuell measuring protocol

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Length	Length tolerance
O0360.2-1.2	Duplex Patchcable LC-SC OS2 G652D 2m LSZH 1,2mm yellow	2.0 m	±5 %
O0360.0,5-1.2		0.5 m	

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld


fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

O0360.1-1.2		1.0 m
O0360.10-1.2		10.0 m
O0360.3-1.2		3.0 m
O0360.5-1.2		5.0 m

datasheets.content.drawings

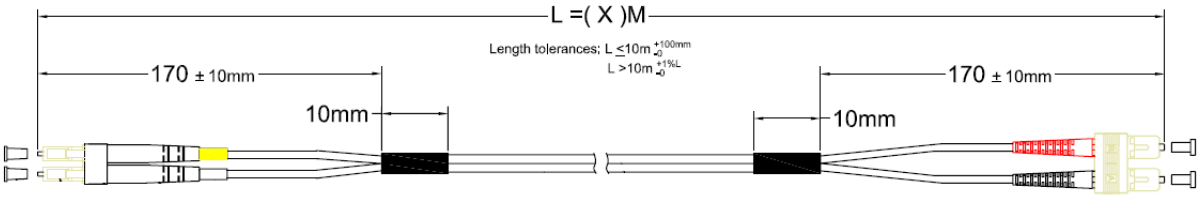

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION