
# DATASHEET

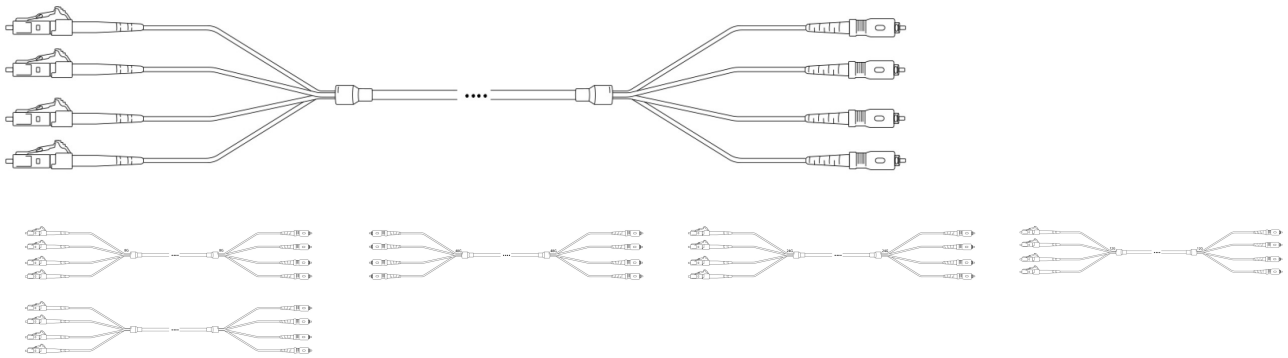

## General data

Characteristics and advantages of Trunk cables:
- 2 up to 48 fibers per cable (other Trunks available on request)
- Pre-assembled, polished and factory-tested
- Both-sided assembled with stepped plug whips
- Ready to use, no need for expensive splice- and measuring equipment
- With Premium or Standard cable divider at customers choice
- Attenuation protocol for each assembled connector included in delivery
- All possible combinations of connectors like LC, E2000®, SC and ST available
- Identification with cable markers
- Delivery depending on length and type: one way drum or cable ring

## Tekniske egenskaber

## Available variants

| ArtNr. | Bezeichnung | Length | Number of connectors connection 1 | Number of connectors connection 2 | Number of fibres |
|---|---|---|---|---|---|
| O8198.1OM3 | | 1.0 m | 48 | 48 | 48 |
| O8302.1OM3 | | 1.0 m | 4 | 4 | 4 |
| O8325.1OM3 | | 1.0 m | 8 | 8 | 8 |
| O8344.1OM3 | | 1.0 m | 12 | 12 | 12 |
| O8393.1OM3 | | 1.0 m | 24 | 24 | 24 |

**Note on Intended Use**

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

**This datasheet was created automatically on 01-11-2026 . Technical changes reserved.**

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION