
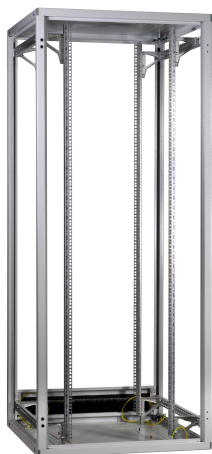



# DATASHEET

## 19" Network Cabinet PRO-Modular 42U, 800x1200 mm, RAL9005



### General data

19" rack frame according to DIN41494

Screwed steel sheet frame, completely pre-assembled, self-ventilated, dismantlable

Inside front and rear 4 x 19" profiles (2 front, 2 rear-sided), galvanised, step-less depth-adjustable

Contrariwise numbering of rack units at the 19" profiles

Delivery without front/rear door and side walls for modular, individual configuration

For installed front and rear door, door stop left or right-sided possible

Cabinets stackable side-by-side with and without removal of the side walls, baying set (Art.-No. PRO-ANR0X), otherwise screwable via screw set M6

Roof and bottom with 4/6 pre-punched openings for cable entry (450 x 90 mm), for 600 mm cabinet width cable entry only rear

Roof prepared for accommodation of 2-fan or 4-fan units, bottom with pre-punched opening for filter or cable entry modules

Internal earthing of all cabinet sections

Pre-assembled earthing bar rear-sided in the middle of the cabinet (ports: 2 x M5 + 2 x 8 mm)

Max. load 1000 kg (depths 600 / 800 mm) resp. 1360 kg (depths 1000 / 1200 mm for >24U)

Paint finish RAL7035, light grey / RAL9005, jet black

Protection degree IP20

Included accessories: 1 x brush, earthing bar pre-installed, 4 x levelling feet M12, 2 x key

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.



# DATASHEET

## 19" Network Cabinet PRO-Modular 42U, 800x1200 mm, RAL9005

Delivery in transport packaging on disposable pallet

### Tekniske egenskaber

### Available variants

| ArtNr.        | Bezeichnung                                               | Colour | Depth   | Material front door | Material rear door | Max. load capacity | Number of height units | Width  | With vertical cable management | Height  | RAL-number | Number of doors |
|---------------|-----------------------------------------------------------|--------|---------|---------------------|--------------------|--------------------|------------------------|--------|--------------------------------|---------|------------|-----------------|
| PRO-4282GR.0D | 19" Network Cabinet PRO-Modular 42U, 800x1200 mm, RAL7035 | grey   | 1200 mm | Without             | Without            | 1360 kg            | 42 HE                  | 800 mm | False                          | 1963 mm | 7035       | -               |
| PRO-4282TS.0D | 19" Network Cabinet PRO-Modular 42U, 800x1200 mm, RAL9005 | black  | 1200 mm | Without             | Without            | 1360 kg            | 42 HE                  | 800 mm | False                          | 1963 mm | 9005       | -               |
| PRO-4782GR.0D | 19" Network Cabinet PRO-Modular 47U, 800x1200 mm, RAL7035 | grey   | 1200 mm | Without             | Without            | 1360 kg            | 47 U                   | 800 mm | False                          | 1963 mm | 7035       | -               |

### Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

