


# DATASHEET

Door for PRO 24U, W=800, Steel, 1-Part, TH, RAL7035

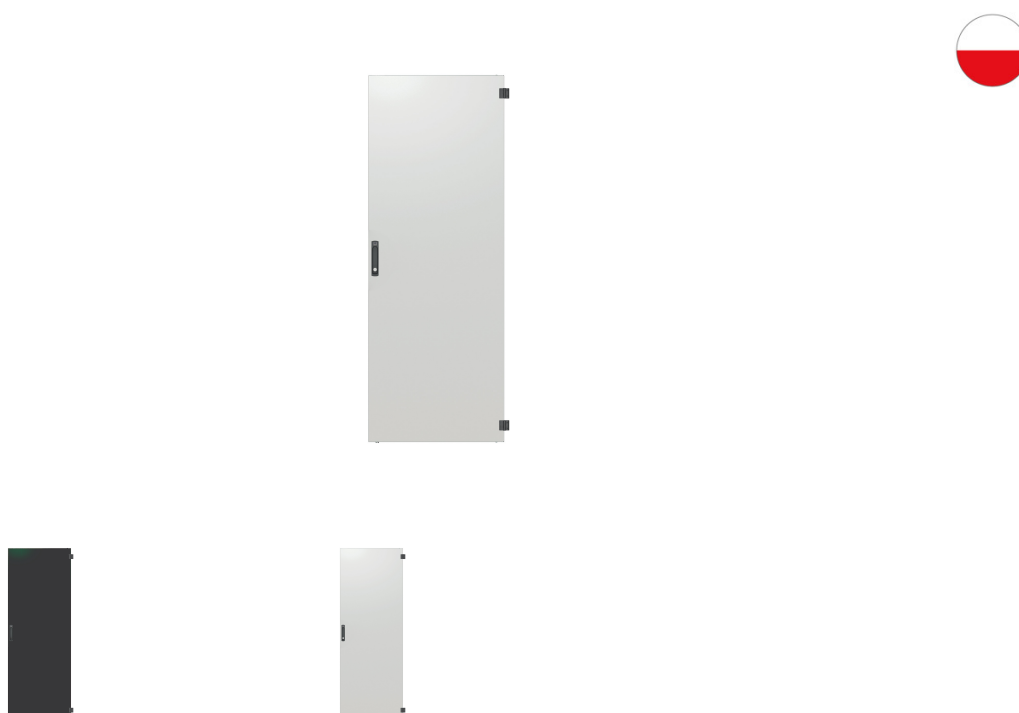

## General data

1-part steel door for 24U cabinets PRO in width 800 mm  
 1-point-locking with turning handle and profile half-cylinder acc. to DIN18252 / EN1303 (PHC exchangeable by customer)  
 Door opening angle 180°  
 Paint finish (steel elements) RAL7035, light grey / RAL9005, jet black  
 Delivery pre-assembled incl. all hinges, screws, 2 x key

## Tekniske egenskaber

## Available variants

| ArtNr.          | Bezeichnung                                         | Building width for cabinet build in | Colour | Height  | Width  | RAL-number | EMC-version | Version as door for disconnecting switch interlocking |
|-----------------|-----------------------------------------------------|-------------------------------------|--------|---------|--------|------------|-------------|-------------------------------------------------------|
| PRO-TUR248S1.GR | Door for PRO 24U, W=800, Steel, 1-Part, TH, RAL7035 | 800 mm                              | grey   | 1085 mm | 800 mm | 7035       | True        | True                                                  |

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.



# DATASHEET

## Door for PRO 24U, W=800, Steel, 1-Part, TH, RAL7035

### Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

