

DATASHEET



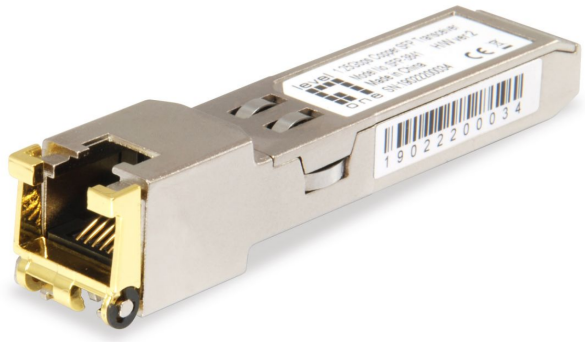



General data

Transfers data from 10/100/1000Base-T copper to fiber interfaces
Hot-swappable
Low electromagnetic interference with metal housing
RoHS compliant and lead-free

The LevelOne SFP-3841 is a copper SFP transceiver that offers increased flexibility. It converts a 1000BASE-X optical Ethernet port (fiber optic) into a copper Ethernet port (1000-BASE-T) to achieve a data transfer rate of up to 1.25Gbps and up to a distance of 100m via UTP/Cat.5 -Cable to enable.

Port configuration
Gigabit RJ45 1

General
Silver color

Features
Hot swappable

Miscellaneous
Transceiver Type Copper SFP

This datasheet was created automatically on 02-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

Grade Commercial

Others
Approvals and Compliance
• CE
• RoHS
• ISO 14001:2015
• ISO 9001:2015
Operating humidity 0%RH ~ 85%RH
Operating temperature 0°C ~ 70°C
Storage temperature -40°C ~ 85°C
Scope of delivery SFP-3841
Quick Installation Guide

Physical Specifications
Dimensions (W x D x H) 13.7 x 57 x 12 mm
Product weight (kg) 0.02

System specifications
Data rate 10/100/1000Base-T
Energy consumption 1.05W
Input voltage 3.3V / 320mA
Standards IEEE 802.3 compatible.

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Unique
SFP-3841		Unique

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION