

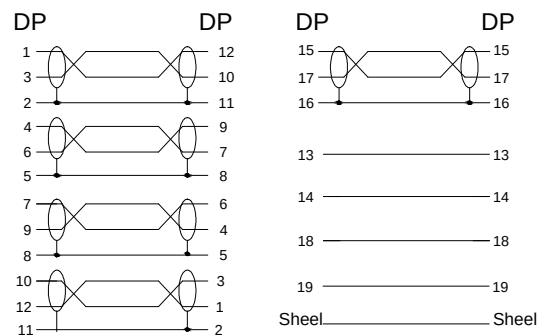


REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2019/11/29	

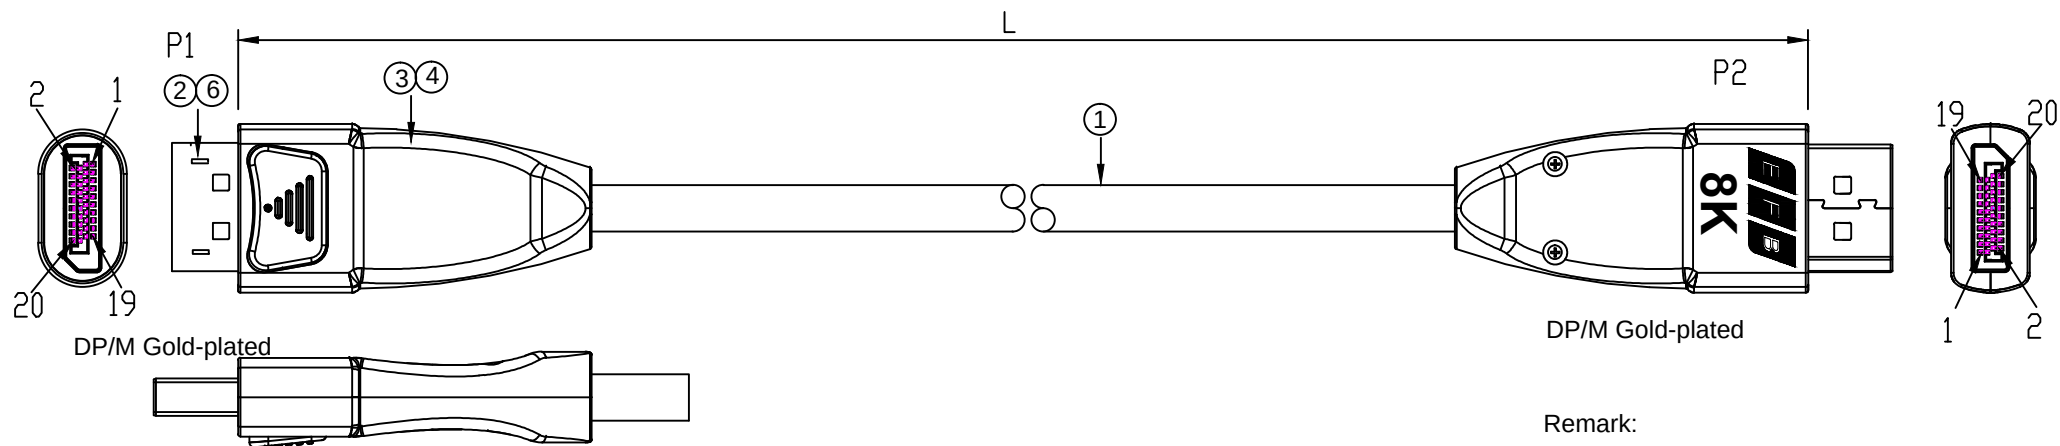

Cable Spec.

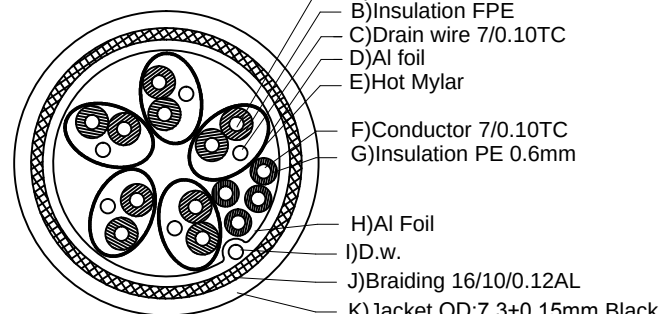


Remark:

1. 100% Open/Short Test
2. Conductive Resistance: 50ohms MAX
3. Insulation Resistance: 10M ohm MIN.
4. HI-POT: DC 300V/10MS.
5. The product is RoHS compliant.
6. Dp to Dp 1.4V

Item NO.	Length
K5567HQS.W.1	1.0m
K5567HQS.W.2	2.0m
K5567HQS.W.3	3.0m

⑤	Lid	PE, DP Lid	2PCS	
④	Shell	Zinc alloy, Dumb gun black	2PCS	
③	Internal Mold	Inner Mould PE	2PCS	
②	Connector	DP male, Gold-Plated	2PCS	
①	Cable	DP 1.4V30AWG [(7/0.10TC+FPE)*1P+7/0.07TC+AL]*5C+ (7/0.10TC+HDPE)*5C+AL+D+160/0.12ALB+ PVCOD7.3mmBlack		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK



ERP NO.:		SAMPLE DWG NO.:	
ZG No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION		PAGE NO	1/1
APPROVAL		DATE	2019/11/29
CHECKED		DRAWN	