



Note:

MATERIAL

- Insulator: PBT+30% Glass Fiber,(UL94V-0)
- Contact: Brass
- Contact Plated: Gold Flash
- Shell: Nickel Plated and Tin Plated

PERFORMANCE

- Current Rate: 5amps
- Insulation Resistance: 1000Megohms Minimum at 500V DC
- Dielectric Strength: 500V Per minute
- Operation Temperature: -55°C to 105°C
- Contact Resistance: 13MilliOhms Maximum

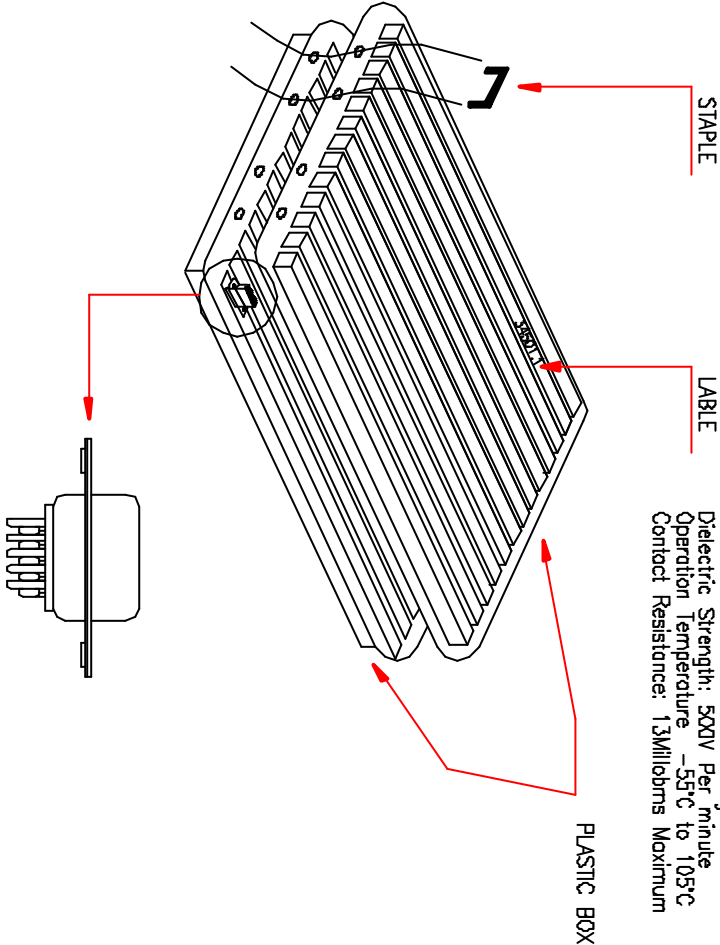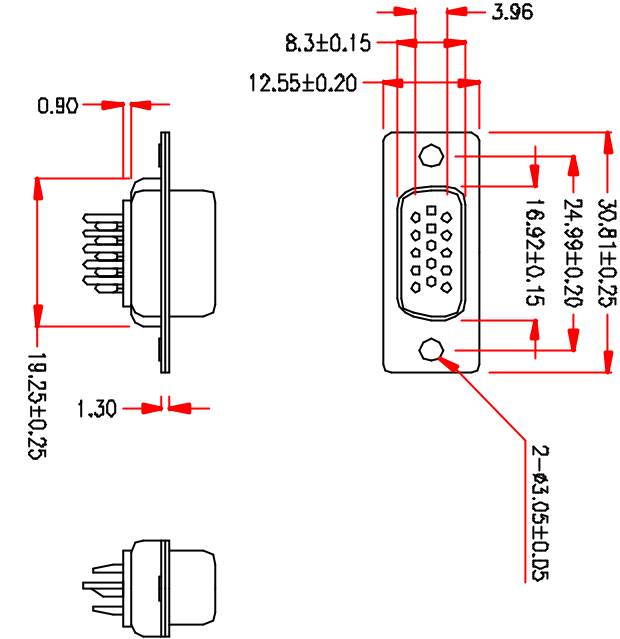

CONNECTOR:

**HIGH DENSITY D-SUB 18PIN
FEMALE, SOLDER TYPE, WHITE
INSULATION**

PART NO. 7017		Revision:	
APPROVED			
CHECKED	RICK		
DRAWING	CAT		
ITEM NO.		34501.1	
Cable Length		Unless Other Spec.	
Tolerances:			
0 ~0.2M		$\pm 0.01M$	
0.2 ~1.0M		$\pm 0.02M$	
1.1 ~1.5M		$\pm 0.025M$	
1.5 ~2.1M		$\pm 0.03M$	
2.1M ↓		$\pm 0.04M$	