

InfraLan Keystone Jack Cat.6A STP**DK-KS6ASx****Application / Approval**


- Category 6A connecting Hardware
- ISO/IEC 11801, EN50173, ANSI/TIA-568-C.2
- IEC60603-7-51
- IEC60512-99-002 (2020-02)
- Ethernet 100Base-TX, Ethernet 1000Base-T, PoE Type1, PoE type2, PoE Type 3, PoE type4

Technical Specifications

Insulation resistance	≥500 MΩ
Dielectric Withstand Voltage	100VAC RMS 60Hz
Contact Resistance	≤ 20 mΩ
Current Rating	1,5 Amp

Mechanical Charasteristics

Housing Material	Diecast, Zink
Insert material	PC 110 UL94V-0
Contact Material	0,5mm ph/br
Contact Plating Micro inches	50µin AU
IDC Material	0,35mm ph/br
RJ45 Jack life cycles	Min. 750 insertions
IDC life cycles	Min. 200 insertions
Wire size	AWG 22-24 solid & stranded

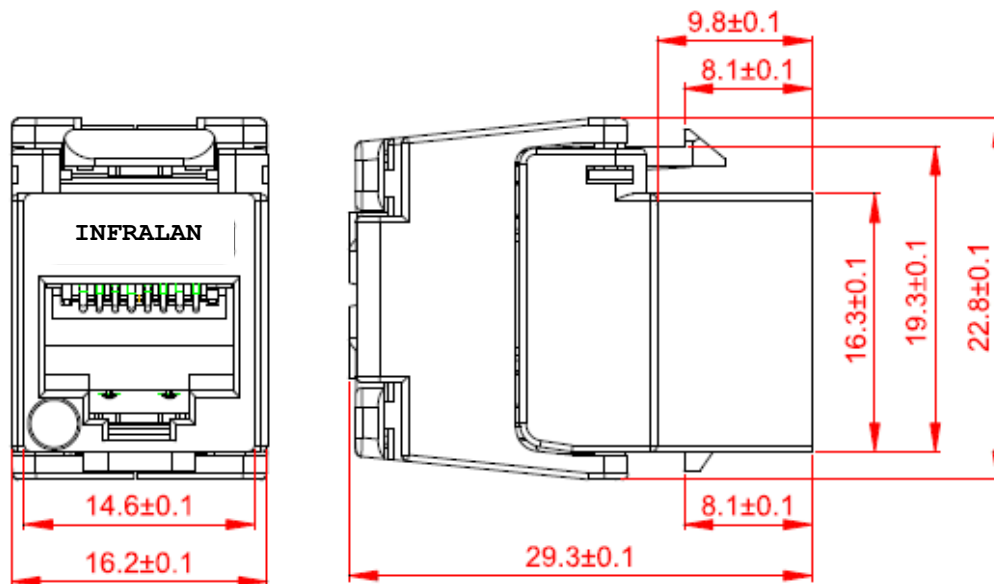

Available in bulk packaging.

Ordering Information

Order no.	EAN	Description	Color	Packsize
DK-KS6ASLP	5705721128136	Connector Cat.6A STP Toolless Jack	Metal	1 / 100
DK-KS6ASLP-BULK	5705721141920	Connector Cat.6A STP Toolless Jack, Bulk	Metal	50 pcs