

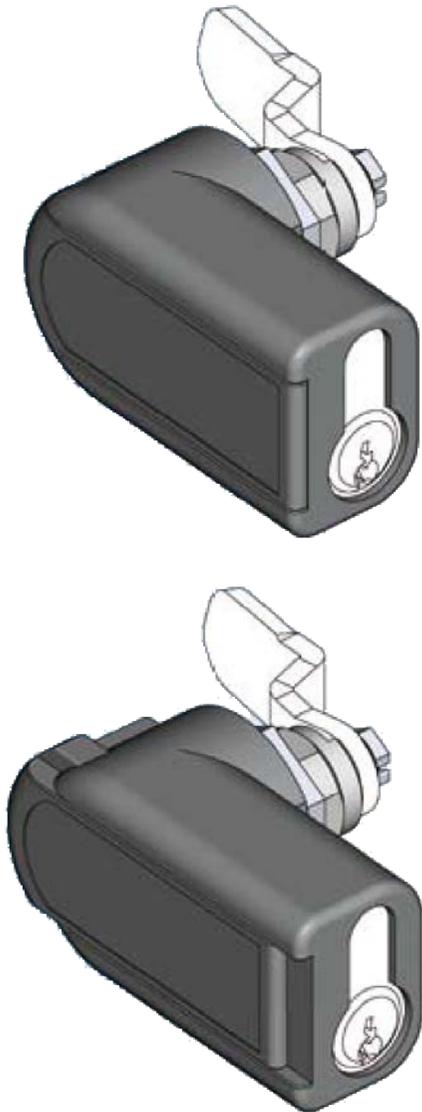

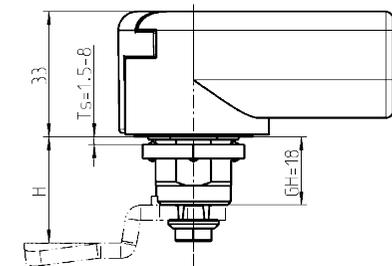


Quarter Turn for Profile Half Cylinder




Specifications:

- Delivery as empty quarter turn for customer mounting of a profile half cylinder
- Shake- and vibration proof with profile half cylinder according to DIN 18252 (EN1303)
- Accordint to DIN EN 61373
- Protection degree IP65
- Housing made of zinc die
- Handle made of polyamide GF black
- Earthing nut and screws made of galvanised steel
- With spring and seal

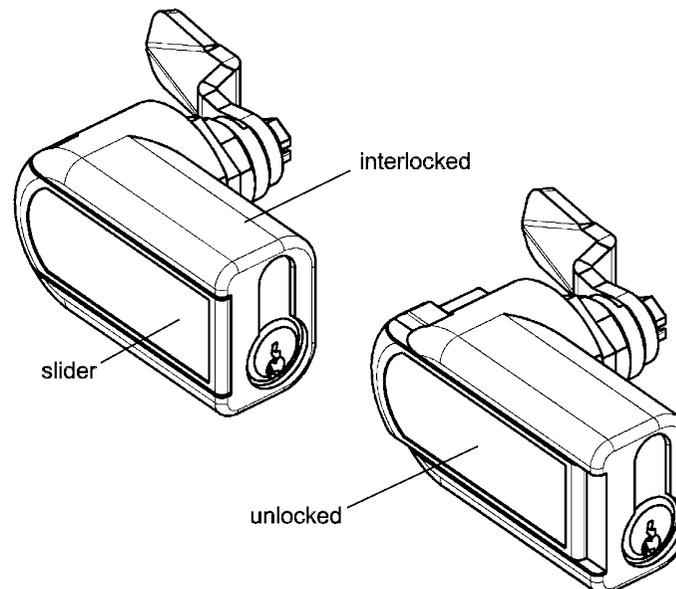

Cut out

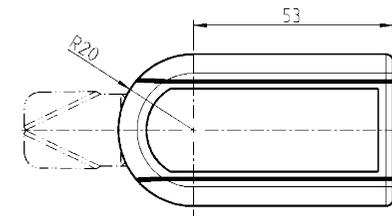

Profile half cylinder DIN 18252 (EN1303) dimension A=30 equals total length 40.
The locking cam has to be between 3 and 5 o'clock.

RoHS
compliant

Created MN	Date 17.03.10
Last rev. MN	Date 17.03.10

Quarter Turn
for profile half cylinder

699989

File: 699989_ENG

