

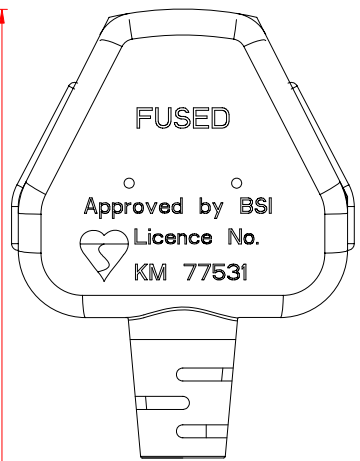


FUSE:

LOGO	FUSE
	5A




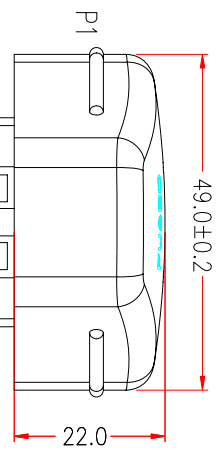


P2: CONNECTOR: 107

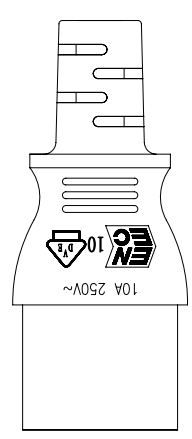


WHITE COVER

PLUG: MSL-403

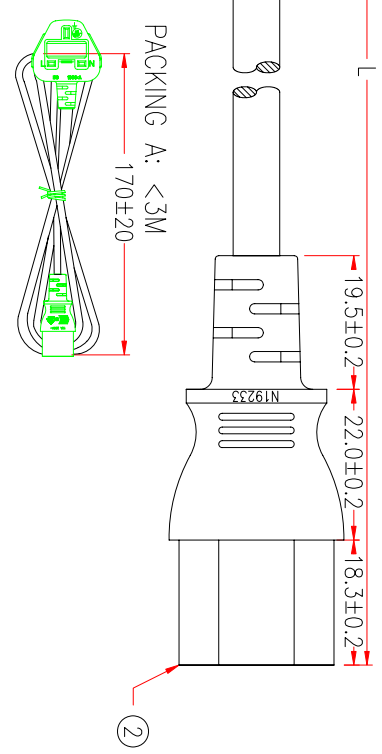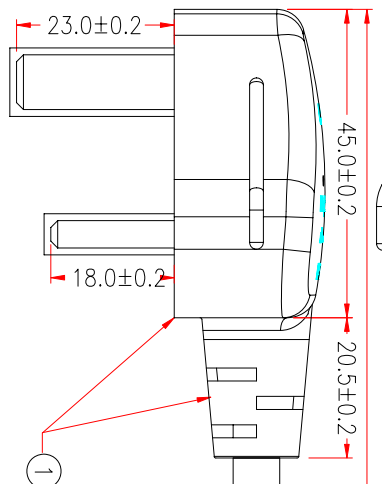

PACKING B: >3M
CABLE TIE

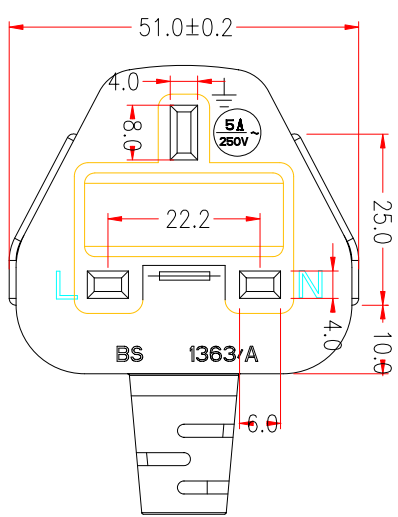

P1	P2
L	L BROWN
N	N BLUE
E	E GREEN/YELLOW

NOTE: All relevant materials are complied with RoHS directive .

3	H05W-F 3G 1.0mm ² G7SA-3, 0D 7.1mm, JACKET BLACK DRAWING No. EPH5V011003C-103		H5TH22-0304K09	L-20mm	M304
2	MOLDED PVC 45P, COLOR BLACK BRACKET: CP-R445A-BS TERMINAL: 2x4mm, 987/44BS-0/A		H1BF01-0304K09 A1QC61-0767 A1QB24-0257	1 3	M304 M767 M257
	MOLDED PVC 45P, COLOR BLACK FUSE LATCH: MSL-403		H1BF01-0304K09		M304
	FUSE: 5A		A1QA40-0767 A1QA04-0455	1 1	M767 M455
	PRESSURE CAP, MSL-403		A1QA41-0402	1	M402
	PLUG BRACKET AND TERMINAL A PIECE TYPE:168T03, MSL-403		A1QA39-0402		M402
No.	DESCRIPTION				
PART NO.107402E3FS3E(FP082-04)			Revision:		
APPROVED	 ELEKTRONIK				
CHECKED					
DRAWING					
DATE					
22/NOV/17	ITEM NO.	EK500.3 & EK500.5	UNIT:mm	 	
Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm ↑ ±40mm					

