



P1

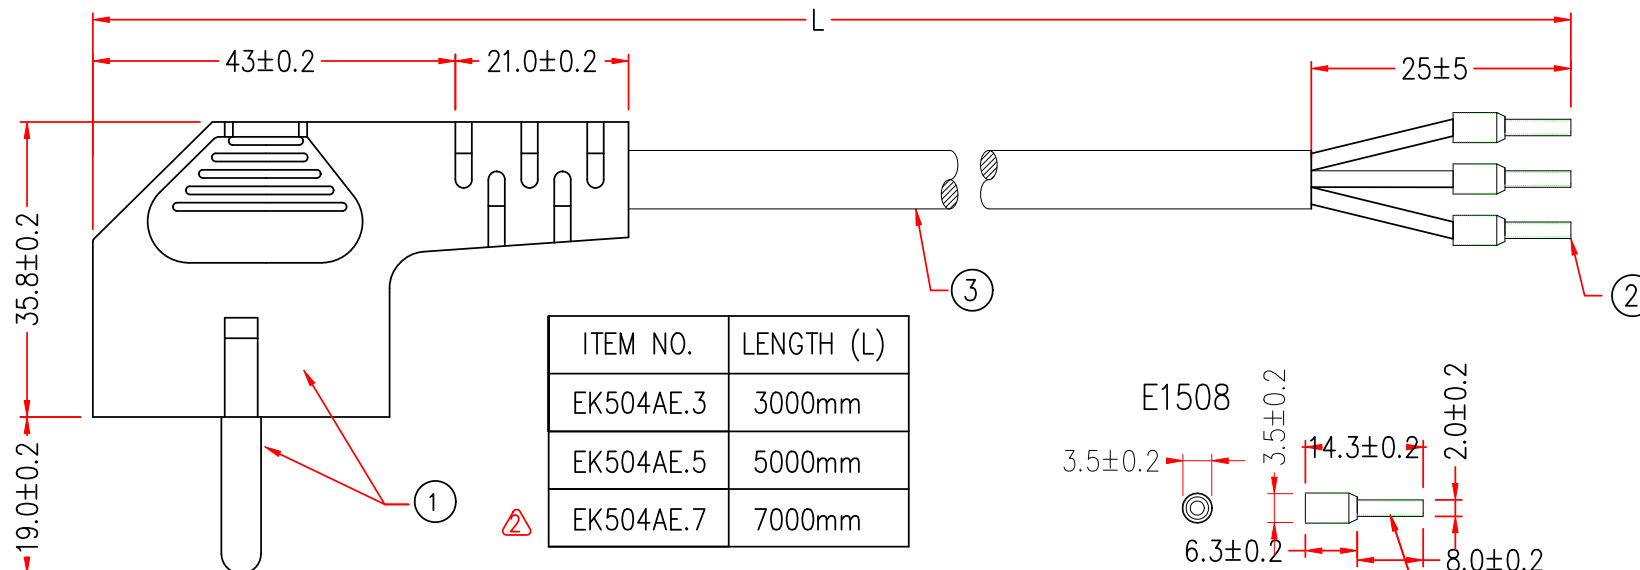

PLUG: 202

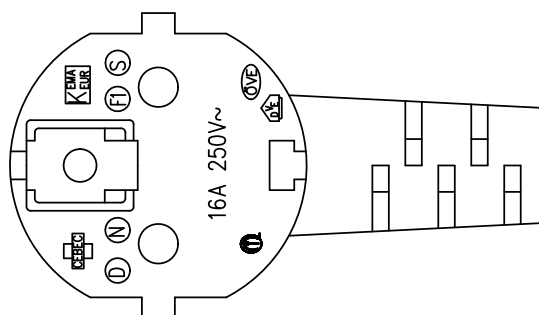


P1


STRIPPED JACKET 25mm

L ————— TERMINAL BROWN
 N ————— TERMINAL BLUE
 E ————— TERMINAL GREEN/YELLOW

E1508

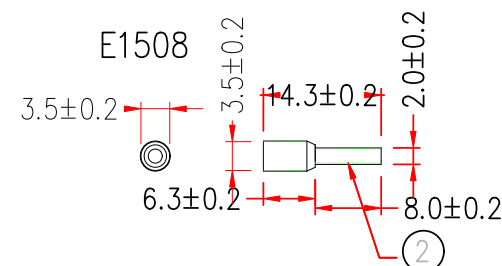

PACKING : >3M



③ CONCAVE LETTERING WORD CABLE:

H05VV-F 3G 1.0mm² ④ ⑤ ⑥ ⑦ ⑧ KEMA-KEUR ⑨ IEMMEQU <VDE> ⑩N20050 GTSA-3 3G 1.0mm² MSL

P1:



* NOTE: All relevant materials are complied with RoHS directive .
1PC IN A POLYBAG

③

3	H05VV-F 3G 1.0mm ² GTSA-3, OD 7.1mm, JACKET BLACK, DRAWING No. EPH5V011003C-103	H5TH22-0304K09	Lmm	M304
2	TERMINAL: E1508, RED COAT	A1RY54-0931	3	M931
1	MOLDED PVC 45P, COLOR BLACK	H1BF01-0304K09		M304
	BRACKET: 98651A	A1QA10-0257	1	M257

No.	DESCRIPTION	Q'TY	Supplier
-----	-------------	------	----------

PART NO. 202DE3FS3F(FP169-04)

Revision:

APPROVED

CHECKED

DRAWING

HU

LAI

DATE

11/AUG/17

ITEM NO.

EK504AE.X

Cable Length
Unless Other Spec.
Tolerances:

0 ~200mm ±10mm
 201~1000mm ±20mm
 1001 ~1500mm ±25mm
 1501~2100mm ±30mm
 2100mm ↑ ±40mm

UNIT:mm



③ REV.3 2017.08.11 MODIFY CONCAVE LETTERING MARKING CABLE&MODIFY CABLE DRAWING NO.EPH5V011003C-103 FROM EPH5V011003C-034

① REV.1 2013.03.11 MODIFY CABLE MARKING CONTENT ② REV.2 2017.07.17 ADD ITEM NO.EK504AE.7

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm