


MTP/MPO TrunkCable 12 Fiber SM

DK-12FCT45OS2x

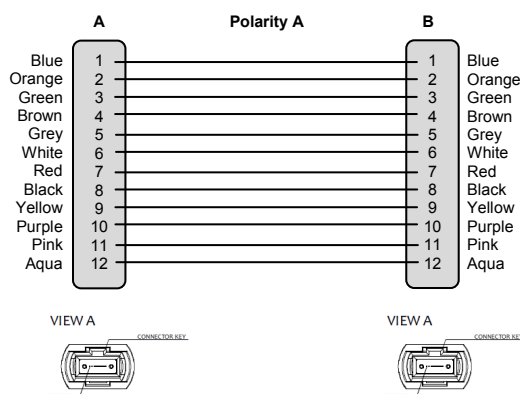

Application / Approval

- High Density & scalability
- In accordance to IEC61754-7 & TIA604-5A
- High speed Ethernet 10G, 25G, 100G
- DataCentre and backbone.

Fiber specifications

- 12 x Singlemode 9/125 OS2 fibre
- LSZH, Double jacket, OD = 4,5mm
- Flame retardant in accordance EN50265-2-1
- Halogenfree EN50267-2-3
- MTP/PC 12 fiber Connector Low Loss IL= $\leq 0,35\text{db}$ / RL= $\geq 55\text{db}$
- Polarity A (1-1, 2-2, 3-3 etc.)

Ordering Information

Order no.	Description	Lenght	Color
DK-12FTC45OS2.5	MTP/MPO Trunkcable 12xSM 9/125 OS2 pol. A	5 mtr.	Yellow
DK-12FTC45OS2.7	MTP/MPO Trunkcable 12xSM 9/125 OS2 pol. A	7 mtr.	Yellow
DK-12FTC45OS2.10	MTP/MPO Trunkcable 12xSM 9/125 OS2 pol. A	10 mtr.	Yellow
DK-12FTC45OS2.12	MTP/MPO Trunkcable 12xSM 9/125 OS2 pol. A	12 mtr.	Yellow
DK-12FTC45OS2.15	MTP/MPO Trunkcable 12xSM 9/125 OS2 pol. A	15 mtr.	Yellow
DK-12FTC45OS2.20	MTP/MPO Trunkcable 12xSM 9/125 OS2 pol. A	20 mtr.	Yellow
DK-12FTC45OS2.25	MTP/MPO Trunkcable 12xSM 9/125 OS2 pol. A	25 mtr.	Yellow

Other lenght on request.

Lenght is specified by the number DK-12FTC45OS2.xx in part number.