


InfraLan Keystone Jack Cat.6 UTP

DK-KS6Ux

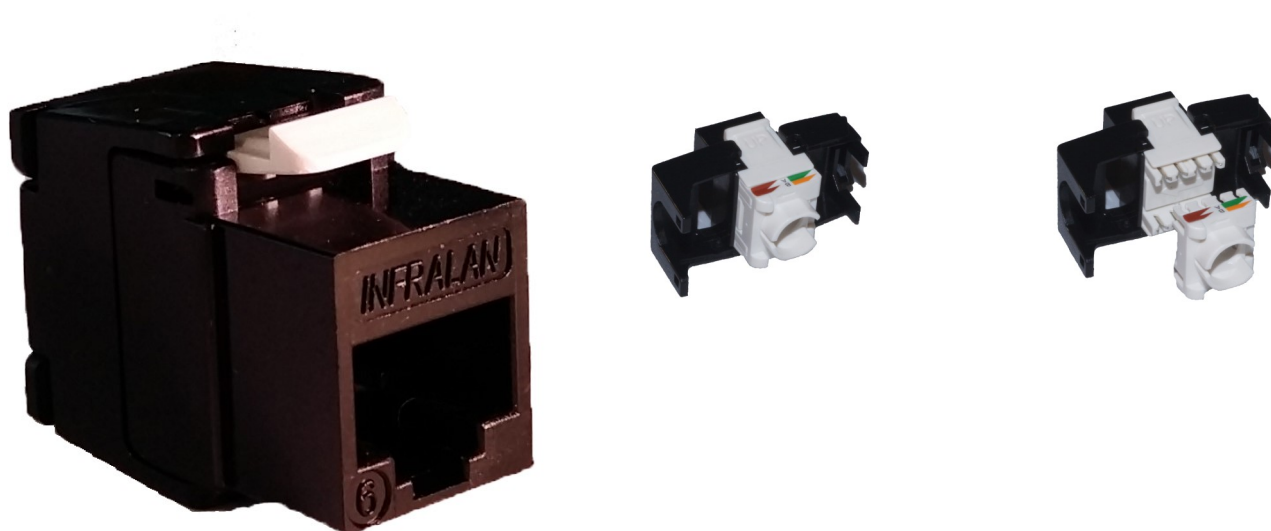

Application / Approval


- Category 6 connecting Hardware
- ISO/IEC 11801, EN50173, ANSI/TIA-568-C.2
- IEC60603-7-51
- Ethernet 100Base-TX, Ethernet 1000Base-T, PoE Type1, PoE type2, PoE Type 3, PoE type4

Technical Specifications

Insulation resistance	≥500 MΩ
Dielectric Withstand Voltage	100VAC RMS 60Hz
Contact Resistance	≤ 20 mΩ
Current Rating	1,5 Amp

Mechanical Characteristics

Housing Material	PC 110 UL94V-0
Contact Material	0,5mm ph/br
Contact Plating Micro Inches	50µin AU
IDC Material	0,35mm ph/br
RJ45 Jack life cycles	Min. 750 insertions
IDC life cycles	Min. 200 insertions
Wire size	AWG 22-24 solid & stranded

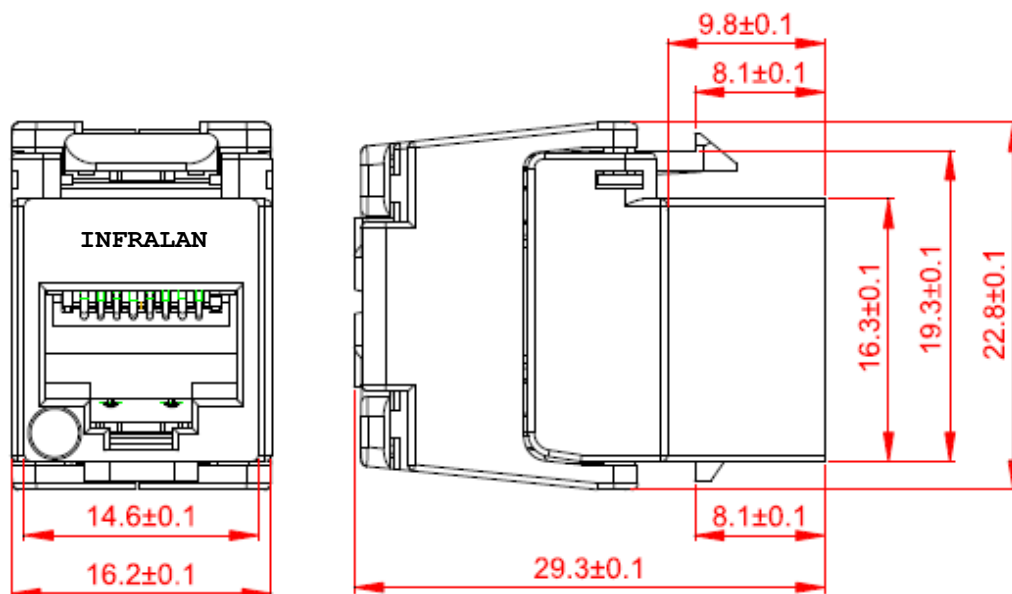

Ordering Information

Order no.	EAN	Description	Color	Packsize
DK-KS6UW	5705721128167	Connector Cat.6 UTP Toolless Jack	White	1 / 100
DK-KS6UB	5705721128150	Connector Cat.6 UTP Toolless Jack	Black	1 / 100
DK-KS6UW-BULK	5705721141968	Connector Cat.6 UTP Toolless Jack, Bulk	White	100 pcs.
DK-KS6UB-BULK	5705721141951	Connector Cat.6 UTP Toolless Jack, Bulk	Black	100 pcs.