


Distribution box, Optical fiber

URM LH 24C

Application

The URM LH 24C M optical distribution box is designed for the placement of 24 optical connectors indoor and outdoor. The distribution box may be complemented by a bracket, which enables it to be post-mounted.

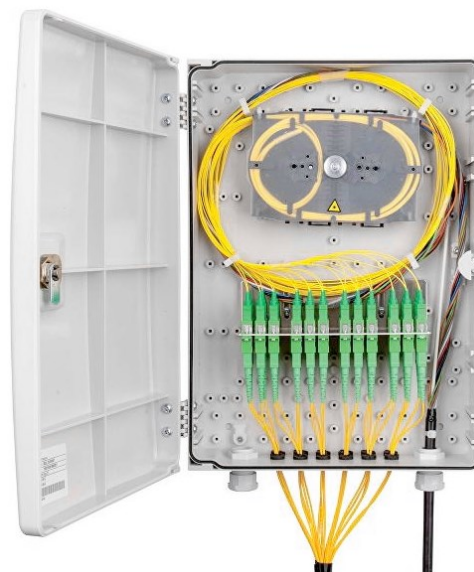

- Maximum capacity is 24 x SC Simplex / LC duplex
- Integrated fibre management + 2 x splice tray for the placement of optical splices
- Possibility of PLC splitter placement
- 2 x PG bushing for input cable
- 12 x Dividable rubber bushing 2 x 1-3 mm for output patchcords
- Use only for fibers G657a,b

Technical Specifications

Materiel :	Distribution box: PC/ABS Bushings: PA6, TPV
Dimension :	250 x 373 x 90mm
Weight :	1,6 kg.
Color :	Light grey RAL7035
Temp:	-40°C to +70°C According to EN60068-2-14
Solar Radiation :	EN60068-2-5
Flameability :	UL94-V0
Impact protection degree :	IK10 to EN50102
Coverage degree :	IP54 in acc. to EN60529
Bushings :	2 x PG13,5 + 12 x Dividable rubber bushing 2 x 1-3mm
Enviroment :	Indoor & outdoor
Number of splices :	1 - 24 splices
Number of Couplers :	1 - 24 Couplers. SC simplex / LC duplex

Ordering Information

Order no.	EAN	Description	Color	Packsize
URM LH 24C	5705721136735	Distribution box up to 24 fiber in/outdoor	Light grey	1 pcs.