


MTP/MPO TrunkCable 12 F MM OM4

DK-12FCT45OM4x

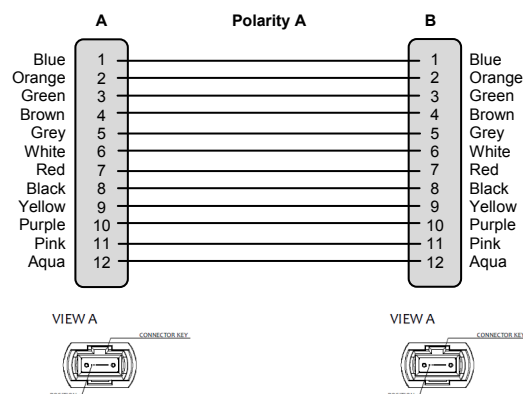

Application / Approval

- High Density & scalability
- In accordance to IEC61754-7 & TIA604-5A
- High speed Ethernet 10G, 25G, 100G
- DataCentre and backbone.

Specifications

- 12 x Multimode 50/125 OM4 fibre
- LSZH, Double jacket, OD = 4,5mm
- Flame retardant in acc. to IEC60332-1
- Smoke density in acc. to EN61034
- Halogenfree in acc. to EN50267-2-3
- Insertion Loss (Low Loss) IL=≤0,35db
- Return Loss RL=≥30db
- Polarity A (1-1, 2-2, 3-3 etc.)

Ordering Information

Order no.	Description	Lenght	Color
DK-12FTC45OM4.5	MTP/MPO Trunkcable 12 x MM 50/125 OM4 Pol: A	5 mtr.	Magenta
DK-12FTC45OM4.7	MTP/MPO Trunkcable 12 x MM 50/125 OM4 Pol: A	7 mtr.	Magenta
DK-12FTC45OM4.10	MTP/MPO Trunkcable 12 x MM 50/125 OM4 Pol: A	10 mtr.	Magenta
DK-12FTC45OM4.12	MTP/MPO Trunkcable 12 x MM 50/125 OM4 Pol: A	12 mtr.	Magenta
DK-12FTC45OM4.15	MTP/MPO Trunkcable 12 x MM 50/125 OM4 Pol: A	15 mtr.	Magenta
DK-12FTC45OM4.20	MTP/MPO Trunkcable 12 x MM 50/125 OM4 Pol: A	20 mtr.	Magenta
DK-12FTC45OM4.25	MTP/MPO Trunkcable 12 x MM 50/125 OM4 Pol: A	25 mtr.	Magenta

Other lenght on request.

Lenght is specified by the number DK-12FTC45OM4.xx in part number.