


InfraLan Keystone Jack Cat.5e

DK-KS5EUx

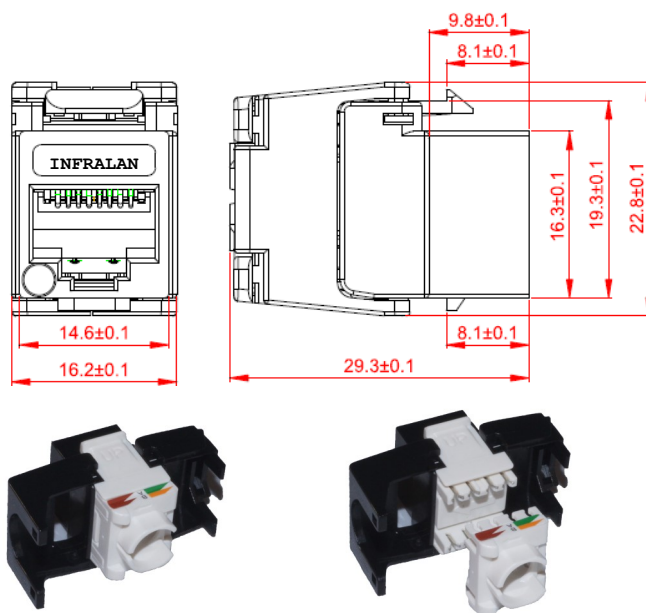

Application / Approval

- Category 5e connection Hardware
- TIA-568-C.2-1 2009, ISO/IEC 11801:2011, EN50173:2011
- IEC60603-7-51

Technical Specifications

Insulation resistance	≥500 MΩ
Dielectric Withstand Voltage	100VAC RMS 60Hz
Contact Resistance	≤ 20 mΩ
Current Rating	1,5 Amp

Mechanical Characteristics

Housing Material	PC 110 UL94V-0
Contact Material	0,5mm ph/br
Contact Plating Micro Inches	50 μin AU
IDC Material	0,35mm ph/br
RJ45 Jack life cycles	Min. 750 insertions
IDC life cycles	Min. 200 insertions
Wire size	AWG 22-24 solid & stranded

Ordering Information

Order no.	EAN	Description	Color	Packsize
DK-KS5EUW	5705721128129	Connector Cat.5e UTP Toolless Jack	White	1 / 100
DK-KS5EUB	5705721128112	Connector Cat.5e UTP Toolless Jack	Black	1 / 100