
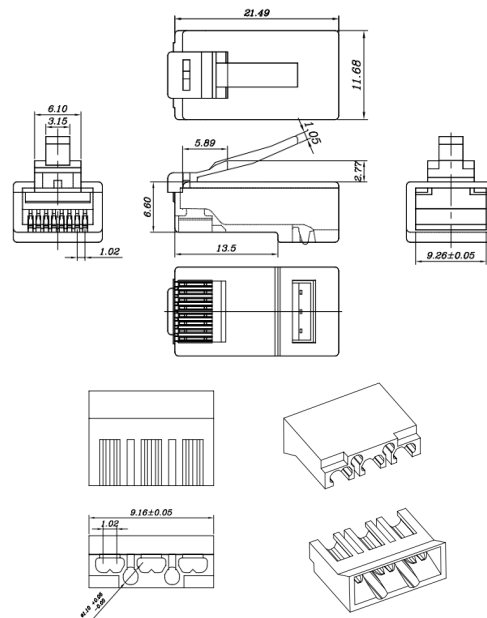


Modular plug 8/8 Category 6A unshielded
For wire OD up to 1,05mm

Drawing no.
VMC15378xx

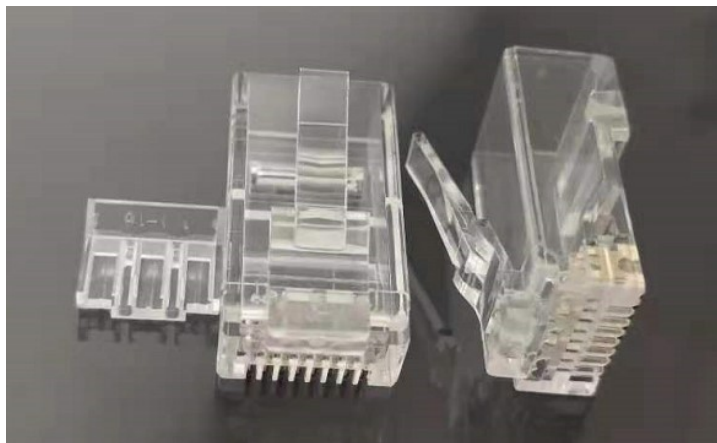

Electrical Specification

UL Application:	250Volt AC, Max at 2Amp.
Dielectric withstanding Voltage:	1000V AC 60sec.
Insulation Resistance:	500Mohm
Contact Resistance:	20mOhm max.
Operation ambient Temp.:	-40°C to +70°C

Mechanical Specification

Strain relief:	20 pound/min.
Durability:	1200 matings cycle
Material housing:	Polycarbonate, UL94-V2
Color:	Transparant.
Contacts:	Copper alloy
Gold Plating:	50um
Wire/Cable:	Round cable, Stranded & Solid wire AWG23—AWG26.
Wire OD:	0,98 to 1,05mm OD
Tooling:	General Modular plug 8/8 tool's, accepted

Ordering information

Order no.	EAN Code	Description	Colour	Packsize
VMC15378	5705721144945	Modular plug 8/8 Cat.6A unshielded max.wire OD 1,05mm	Transparent	100 pcs.
VMC15378-10	5705721144921	Modular plug 8/8 Cat.6A unshielded max.wire OD 1,05mm	Transparent	10 pcs.
Accessories				
RJ45SROB-WH	5705721144969	Boot for Modular Plug, Cable OD=6,5mm	White	1 pcs.
RJ45SROB-BK	5705721144976	Boot for Modular Plug, Cable OD=6,5mm	Black	1 pcs.