
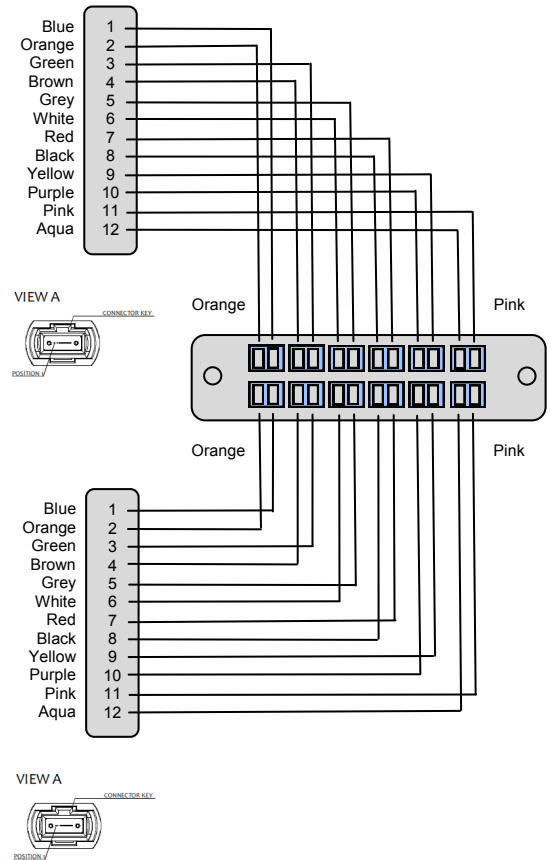


MTP Cassette 1xMTP-24xLC Pol.C

DK-819LC24-C

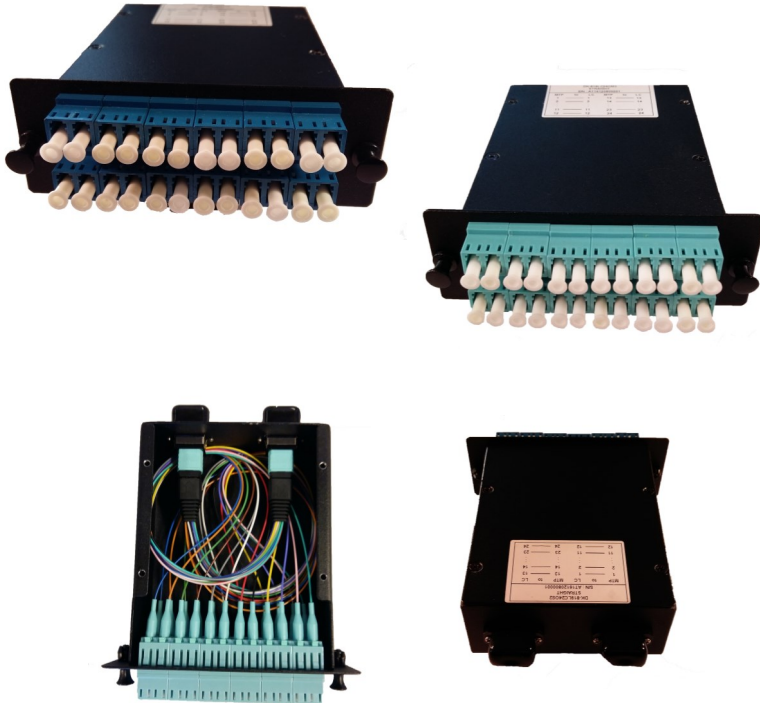

Application / Approval

- High Density & scalability
- In accordance to IEC61754-7 & TIA604-5A
- High speed Ethernet 10G SX 850 nm 550mtr.
- DataCentre and backbone.

Specifications

- Dimension: DxWxH 112x106x30mm $\pm 0,1$
- Temperature range: -20°C to $+60^{\circ}\text{C}$
- MTP: Male with High precision guid pins
- MTP/PC 12F MM: Low loss IL = $\leq 0,35\text{db}$ / RL = $\geq 30\text{db}$
- MTP/PC 12F SM: Low loss IL = $\leq 0,35\text{db}$ / RL = $\geq 55\text{db}$
- Temperature range: -20°C to $+85^{\circ}\text{C}$
- Polarity: C (1-2, 2-1, 3-4, 4-3, etc.)

Ordering Information

Order no.	Description	Color
DK-819LC24OS2-X	MTP Cassette SM OS2 2xMTP to 24xLC Pol. C	Blue/Black
DK-819LC24OM3-X	MTP Cassette MM OM3 2xMTP to 24xLC Pol. C	Turquoise/black
DK-819LC24OM4-X	MTP Cassette MM OM4 2xMTP to 24xLC Pol. C	Magenta/black