
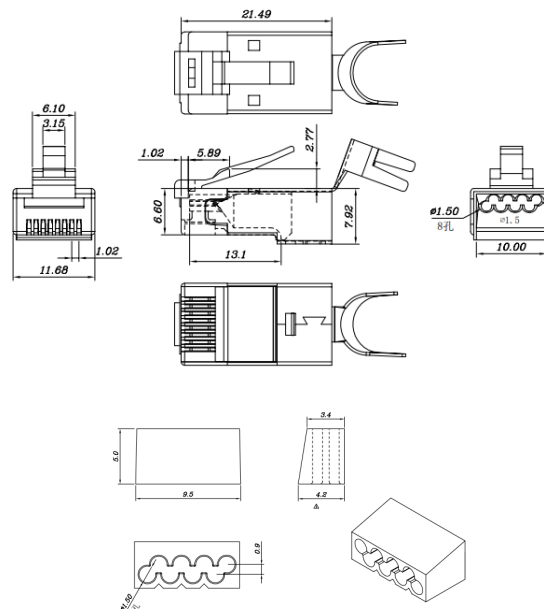


Modular plug 8/8 Category 6A shielded
For wire OD up to 1,45mm

Drawing no.
VMC15379xx

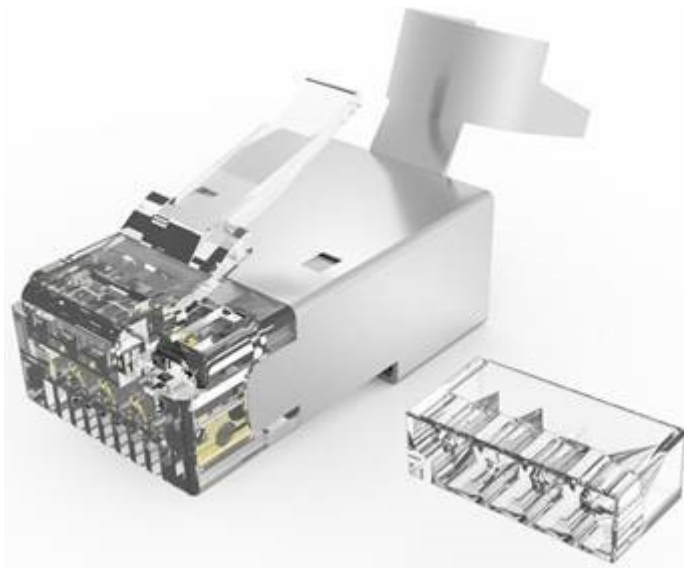

Electrical Specification

UL Application:	250Volt AC, Max at 2Amp.
Dielectric withstanding Voltage:	1000V AC 60sec.
Insulation Resistance:	500Mohm
Contact Resistance:	20mOhm max.
Operation ambient Temp.:	-40°C to +70°C

Mechanical Specification

Strain relief:	20 pound/min.
Durability:	1200 matings cycle
Material housing:	Polycarbonate, UL94-V2
Color:	Transparant.
Contacts:	Copper alloy
Gold Plating:	50um
Wire/Cable:	Round cable max.OD , Stranded & Solid wire AWG23—AWG26.
Wire OD:	1,35 to 1,45mm OD

Ordering information

Order no.	EAN Code	Description	Colour	Packsize
VMC15379	5705721144952	Modular plug 8/8 Cat.6A shielded max.wire OD 1,45mm	Transparent	100 pcs.
VMC15379-10	5705721144938	Modular plug 8/8 Cat.6A shielded max.wire OD 1,45mm	Transparent	10 pcs.
Tooling & Accessories				
HT-2012	5705721145034	Hand Crimp tool for Modular Plug Shielded 8/8	Blue/black	1 pcs.
RJ45SROB-WH	5705721144969	Boot for Modular Plug, Cable OD=6,5mm	White	1 pcs.
RJ45SROB-BK	5705721144976	Boot for Modular Plug, Cable OD=6,5mm	Black	1 pcs.