



**EASY PLUG—Modular plug 8/8 Category 6
Unshielded**

Drawing no.
VMC15371

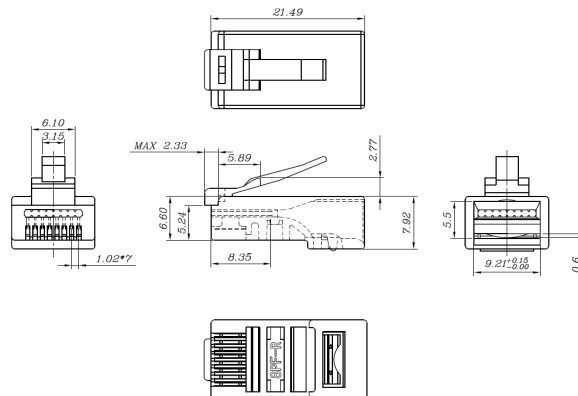

Electrical Specification

UL Application:	250Volt AC, Max at 2Amp.
Dielectric withstanding Voltage:	1000V AC 60sec.
Insulation Resistance:	500Mohm
Contact Resistance:	20mOhm max.
Operation ambient Temp.:	-40°C to +70°C

Mechanical Specification

Strain relief:	20 pound/min.
Durability:	1200 matings cycle
Material housing:	Polycarbonate, UL94V-0 / UL94-V2
Color:	Transparant. Other colors on request
Contacts:	Copper alloy
Gold Plating:	50um
Wire/Cable:	Stranded & Solid wire AWG23—AWG26.
Wire OD:	0,93 to 1,04mm OD

Ordering information

Order no.	EAN Code	Description	Colour	Packsize
VMC15371	5705721143344	Modular Easy Plug 8/8 Cat.6 Un-shielded	Transparent	100 pcs.
VMC15371-10	5705721144914	Modular Easy Plug 8/8 Cat.6 Un-shielded	Transparent	10 pcs.
TOOLING				
HT-2010	5705721143351	Modular Crimp Tool for Easy Plug	Blue/black	1 pcs.