


MPO TrunkCable 12 F MM OM3

DK-12FTC45OM3x

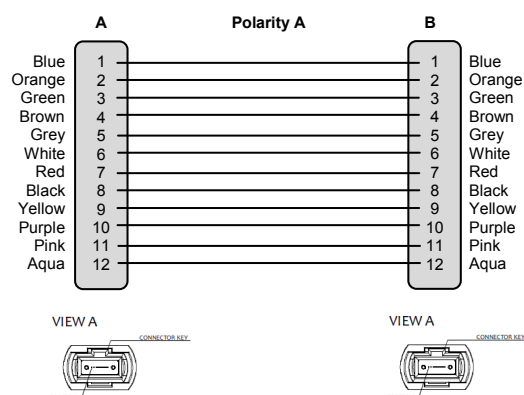

Application / Approval

- High Density & scalability
- In accordance to IEC61754-7 & TIA604-5A
- High speed Ethernet 10G SX 850 nm 550mtr.
- DataCentre and backbone.

Fiber specifications

- 12 x Multimode 50/125 OM3 fibre
- LSZH, Double jacket, OD = 4,5mm
- Flame retardant: In acc. to EN60332-1
- Halogenfree: EN50267-2-3
- Low smoke: EN61034
- Temperature range: -20°C to +60°C
- Min bending radius: Install = 20xD
- Min bending radius: Static = 10xD
- Insertion loss: ≤ 0,35db
- Return loss: ≥ 30db
- Temperature range: -20°C to +85°C
- Polarity: A (1-1, 2-2, 3-3 etc.)

Ordering Information

Order no.	Description	Lenght	Color
DK-12FTC45OM3.5	MTP/MPO Trunkcable 12 x MM 50/125 OM3 Pol.: A	5 mtr.	Aqua
DK-12FTC45OM3.7	MTP/MPO Trunkcable 12 x MM 50/125 OM3 Pol.: A	7 mtr.	Aqua
DK-12FTC45OM3.10	MTP/MPO Trunkcable 12 x MM 50/125 OM3 Pol.: A	10 mtr.	Aqua
DK-12FTC45OM3.12	MTP/MPO Trunkcable 12 x MM 50/125 OM3 Pol.: A	12 mtr.	Aqua
DK-12FTC45OM3.15	MTP/MPO Trunkcable 12 x MM 50/125 OM3 Pol.: A	15 mtr.	Aqua
DK-12FTC45OM3.20	MTP/MPO Trunkcable 12 x MM 50/125 OM3 Pol.: A	20 mtr.	Aqua
DK-12FTC45OM3.25	MTP/MPO Trunkcable 12 x MM 50/125 OM3 Pol.: A	25 mtr.	Aqua

Other lenght on request.

Lenght is specified by the number DK-12FTC45OM3.xx in part number.