


DATASHEET





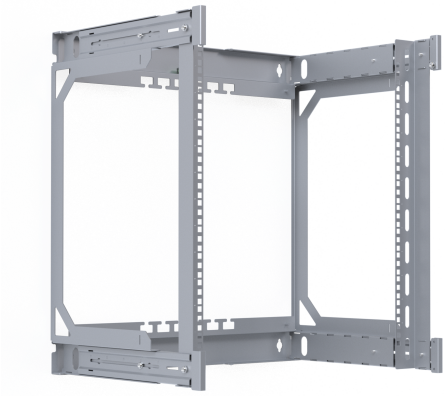







General data

New generation of 19” wall cabinets, which gives the installer 100% flexibility during installation.
The assembly process of the rack is done during the installation of hardware into the cabinet. All the cover plates (side walls, roof + bottom and front door) can be installed on the final end of the job.
By ordering the back frame separately, you can wait to order cover plates and front door until the color are decided.

Back frame for 19” wall housing “X-Rack”, depth-adjustable to 400, 450, 500, 550 and 600 mm
19” profiles depth-adjustable
100% Protection against installation error due to equal roof and bottom
Maximum load 60 kg for static equal distribution
Protection degree IP20 when using the outer cover
El-galvanised steel plates for higher quality
Arrangement for cable strain relief in top and bottom
Side walls + roof and bottom elements can be ordered separately

This datasheet was created automatically on 03-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

M5 screw pin, for grounding connection in all 4 frame corners

General data:

Modular spacing 19” inch, 482,6 mm
Material & surface inner parts El-galvanised Z275, steel plate
Degree of protection IP20
Maximum load 60 kg
Width 600 mm
Height 9U:500 mm / 12U: 600 mm / 15U: 766 mm
Depth Adjustable 400 mm, 450 mm, 500 mm, 550 mm, 600 mm
Wall hanging support Keyholes for 2 x M8 bolts in upper and lower profile
Packaging Package no 1 of 3, recycled cartonboard

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Colour	Depth	Height	Max. Load	Number of height units	Width
WGX-BF09		zinc	400-600 mm	500 mm	60 kg	9 U	600 mm
WGX-BF12		zinc	400-600 mm	600 mm	60 kg	12 U	600 mm
WGX-BF15		zinc	400-600 mm	766 mm	60 kg	15 U	600 mm

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product’s suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION