


DATASHEET

Duplex Patchcable SC-SC OM5 0,5m LSZH 3mm limegreen

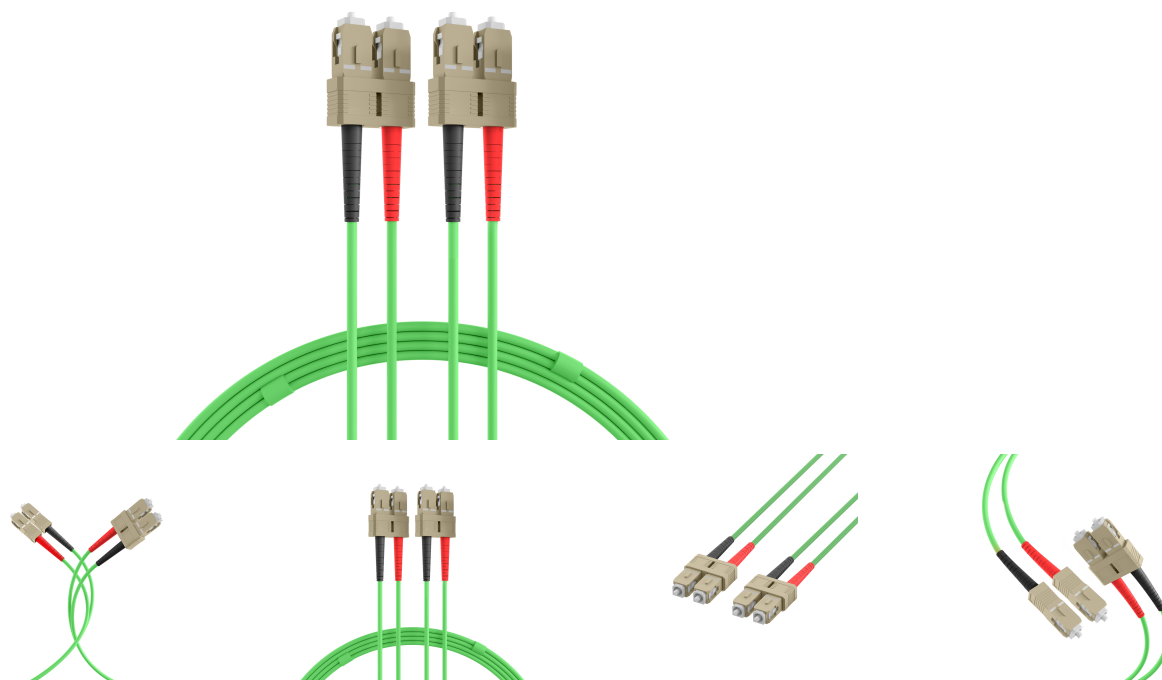

General data

Fiber jumper are well defined components in international standard of structured cabling ISO/IEC11801. Due to many different network protocols created in the last 25 years , also a wide range of connectors had been developed. Some of them are still important today: LC, SC, E2000®, MPO/MTP.

Fiber jumper (patchcord) are defined as shortest connection between passive interface and active deviceport, regarding structured cabling standard. Rating of performance, known as category, as well as performance of total transmission channel, known as link class, Similar descriptions for patchcords: Connection cable, drop cable, adapter cable, interconnecting cord, Jumper

Features of EFB fiber optic patch cables

Tension relief reinforced with aramid yarn

Halogen-free and flame-retardant sheath according to IEC-60754-2, IEC-60332-1 and IEC-61034

EFB fiber optic connectors meet the minimum quality class Grade B/2 according to IEC-61753-1 for singlemode and Grade A/1 for multimode according to IEC 61753-122-2 (UPC cut)

100% tested and with individual measurement report

Tekniske egenskaber

Available variants


This datasheet was created automatically on 15-09-2026 . Technical changes reserved.

DATASHEET

Duplex Patchcable SC-SC OM5 0,5m LSZH 3mm limegreen

ArtNr.	Bezeichnung	Length Length tolerance	
00318.0,5OM5	Duplex Patchcable SC-SC OM5 0,5m LSZH 3mm limegreen	0.5 m	±5 %
00318.1OM5	Duplex Patchcable SC-SC OM5 1m LSZH 3mm limegreen	1.0 m	±5 %
00318.2OM5	Duplex Patchcable SC-SC OM5 2m LSZH 3mm limegreen	2.0 m	±5 %
00318.3OM5	Duplex Patchcable SC-SC OM5 3m LSZH 3mm limegreen	3.0 m	±5 %
00318.5OM5	Duplex Patchcable SC-SC OM5 5m LSZH 3mm limegreen	5.0 m	±5 %
00318.7,5OM5	Duplex Patchcable SC-SC OM5 7,5m LSZH 3mm limegreen	7.5 m	±5 %
00318.10OM5	Duplex Patchcable SC-SC OM5 10m LSZH 3mm limegreen	10.0 m	±5 %
00318.15OM5	Duplex Patchcable SC-SC OM5 15m LSZH 3mm limegreen	15.0 m	±5 %
00318.20OM5		20.0 m	
00318.25OM5		25.0 m	
00318.30OM5		30.0 m	
00318.35OM5		35.0 m	
00318.40OM5		40.0 m	
00318.50OM5		50.0 m	

datasheets.content.drawings

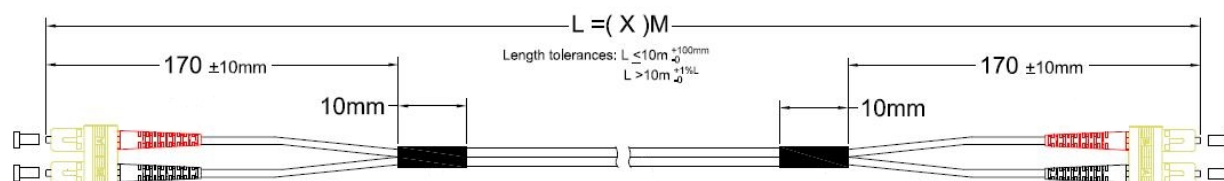

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 15-09-2026 . Technical changes reserved.